

DIMENSION™

Indoor & Outdoor LED Tape Light Kits

DIMENSION PRO

INDOOR LED SMART TAPE LIGHT KIT



STARFISH™
Controlled with App



**STARFISH™ SMART
ENABLED PRODUCT**

**DYNAMIC RGB,
COLOR-CHANGING
& TUNABLE WHITE**

**PRE-SET & CUSTOM
COLOR-CHANGING EFFECTS**

**IR REMOTE CONTROL
OR APP CONTROLLED**

**16FT, 32FT & 64FT
KITS AVAILABLE**

**PLUG-IN OR
DIRECT-WIRE KITS**

CUTTABLE & LINKABLE

SUGGESTED APPLICATIONS:
Commercial or Decorative
Residential Applications

HIGH BRIGHTNESS



Millions of Colors



Warm to Cool Tunable White

Immerse yourself in a world of limitless possibilities with DIMENSION Pro, the smart app-controlled tape light that will redefine your lighting experience. With the ability to choose from millions of colors or adjust the light from warm to cool tunable white, this STARFISH™ smart product puts the power of customization in your hands. Sync your light to the rhythm of your favorite music and watch as your space comes alive with vibrant hues and captivating effects. From soothing transitions to dynamic color-changing displays, DIMENSION Pro offers a wide range of mesmerizing options that will transform your space into a visual spectacle.

STARFISH™ ENABLED PRODUCT

Build Scenes Remote Access Set Schedules Voice Control



*Via App or Remote

GENERAL SPECIFICATIONS

Color: RGBTW
CRI: 80
Functional Life: 50,000 Hours
Location Rating: Dry (Indoor Only)
Wired Controller: Yes

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Cut to Length: Yes
Dimmable: Yes, Dimmable with App or Remote
Warranty: 1 Year
Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64/130	16'	Plug In	120V	24V	18W	1920L	1	045923640292
64/131	32'	Plug In	120V	24V	30W	3080L	1	045923640308
64/132	64'	Plug In	120V	24V	68W	6300L	2	045923640520
64/133	16'	Direct Wired	120V-277V	24V	20W	1920L	1	045923640537
64/134	32'	Direct Wired	120V-277V	24V	30W	3080L	1	045923640544
64/135	64'	Direct Wired	120V-277V	24V	68W	6300L	2	045923640551

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire Junction Box



Controller/Receiver



Dual Controller/Receiver



IR Remote



Single Reel for
64/130, 64/131, 64/132, and 64/133 Kits



Dual Reel for
64/132 and 64/135 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	Qty/ Pcs	UPC
Tape Extension and Connectors			
Tape to Tape			
64/160	Tape-to-Tape Connector	5	045923644788
64/161	6" Jumper Wire	5	045923644795
64/162	90° Connector	5	045923644801
Wire to Tape			
64/164	Wire to Tape Connector	6	045923644177
64/165	50' Tape Wire	1	045923644184
Channels and Diffusers			
Recessed			
64/150	Recessed Deep Channel and Diffuser	5	045923644733
Surface			
64/151	Deep Channel and Diffuser	5	045923644740
64/154	Shallow Channel and Diffuser	5	045923644771
Corner			
64/152	45° Corner Channel and Diffuser	5	045923644757



64-164



64-160



64-165



64-162



64-161



64-154



64-152



64-151



64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS



64/130 | 64/133



64/131 | 64/132 | 64/134 | 64/135



DRIVER CONNECTION DIAGRAMS

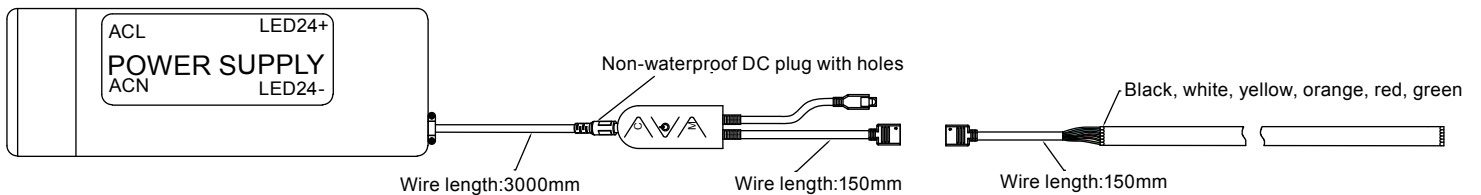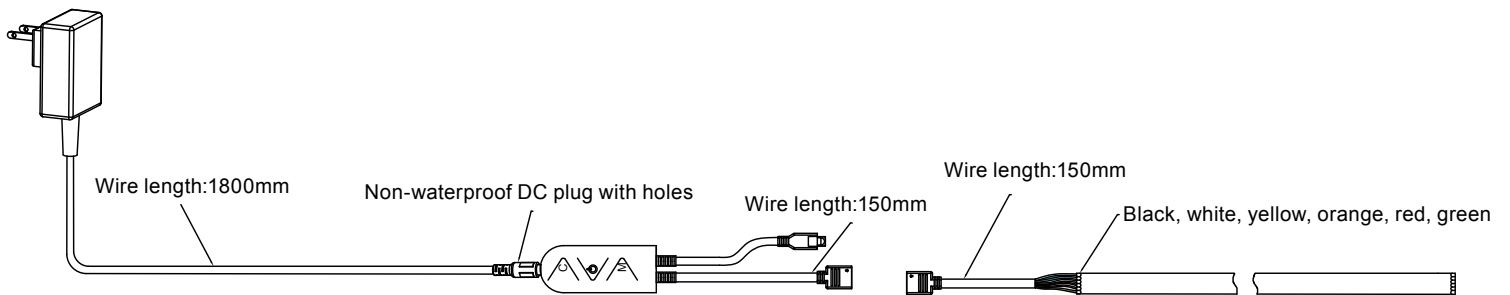

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

DIMENSION PRO

OUTDOOR LED SMART TAPE LIGHT KIT



STARFISH™
Controlled with App



**STARFISH™ SMART
ENABLED PRODUCT**

**DYNAMIC RGB,
COLOR-CHANGING
& TUNABLE WHITE**

**PRE-SET & CUSTOM
COLOR-CHANGING EFFECTS**

**RF REMOTE CONTROL OR
APP CONTROLLED**

**16FT, 32FT & 64FT
KITS AVAILABLE**

**PLUG-IN OR
DIRECT-WIRE KITS**


SUGGESTED APPLICATIONS:

Outdoor Commercial or
Decorative Outdoor
Residential Applications

HIGH BRIGHTNESS



Millions of Colors



Warm to Cool Tunable White

Elevate your outdoor space with DIMENSION Pro Outdoor tape light kits. This smart, app-controlled lighting solution offers limitless customization. Choose from millions of colors and adjust the light from warm to cool tunable white. Sync it with your music for vibrant and captivating effects. With mesmerizing options, DIMENSION Pro transforms your outdoor area into a visual spectacle.

STARFISH™ ENABLED PRODUCT

Build Scenes Remote Access Set Schedules Voice Control

WIFI 2.4GHz No Hub Required

works with Google Home

works with alexa

WET LOCATION

IP 65

DIMMABLE

50,000 HOURS

TRUSTED NB WARRANTY

1 YEAR WARRANTY

Add to Siri

Works with SmartThings

*Via App or Remote

GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Wet

Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cut to Length: No

Dimmable: Yes, Dimmable with App or Remote

Warranty: 1 Year

Remote: RF



ITEM SPECIFICATIONS / ORDER INFO

Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64/140	16'	Plug In	120V	24V	18W	1920L	1	045923640568
64/141	32'	Plug In	120V	24V	30W	3080L	1	045923640575
64/142	64'	Plug In	120V	24V	68W	6300L	2	045923640582
64/143	16'	Direct Wired	120V-277V	24V	20W	1920L	1	045923640599
64/144	32'	Direct Wired	120V-277V	24V	30W	3080L	1	045923640605
64/145	64'	Direct Wired	120V-277V	24V	68W	6300L	2	045923640506

INCLUDED ACCESSORIES



Plug-In Driver



Direct Wire Junction Box



Mounting Clips



Receiver



RF Remote



Single Reel for
64/140, 64/141, 64/143, & 64/144 Kits



Dual Reel for
64/142 and 64/145 Kits



Dual Receiver

OPTIONAL ACCESSORIES



Mounting
Clip Pack




End Caps & Glue Set
64-166

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS



64/140 | 64/143

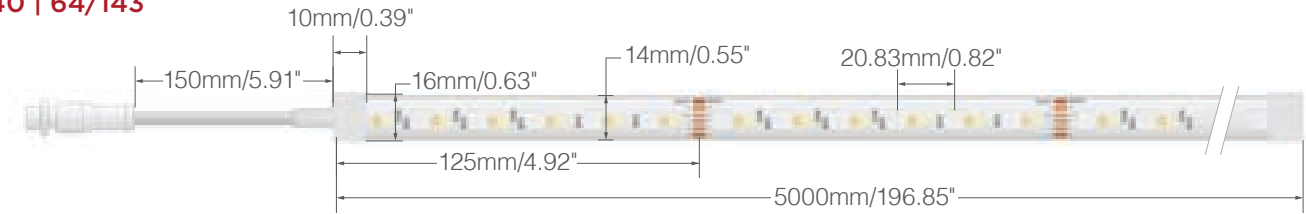

64/141 | 64/142 | 64/144 | 64/145

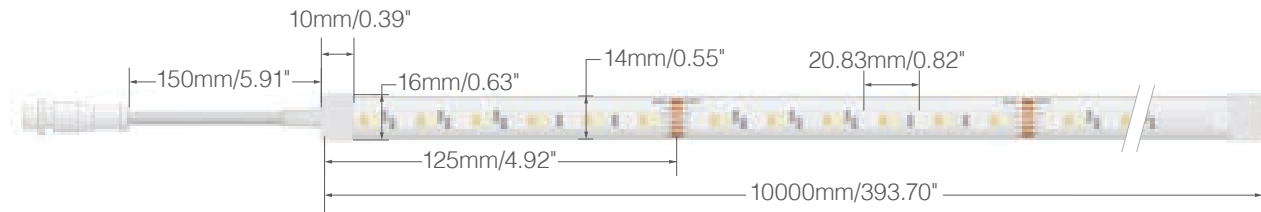

DRIVER CONNECTION DIAGRAMS

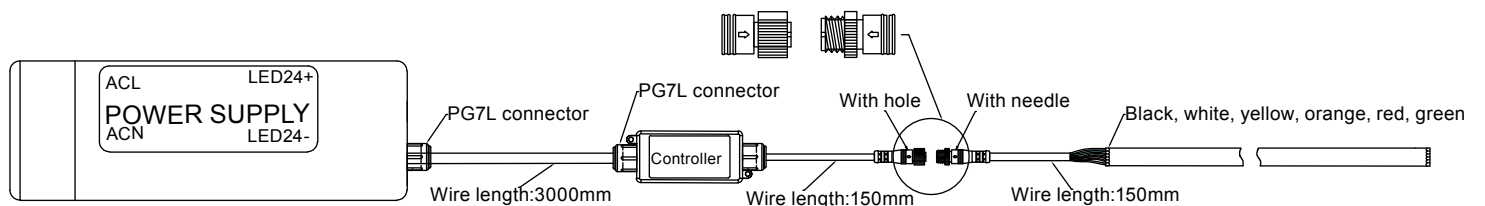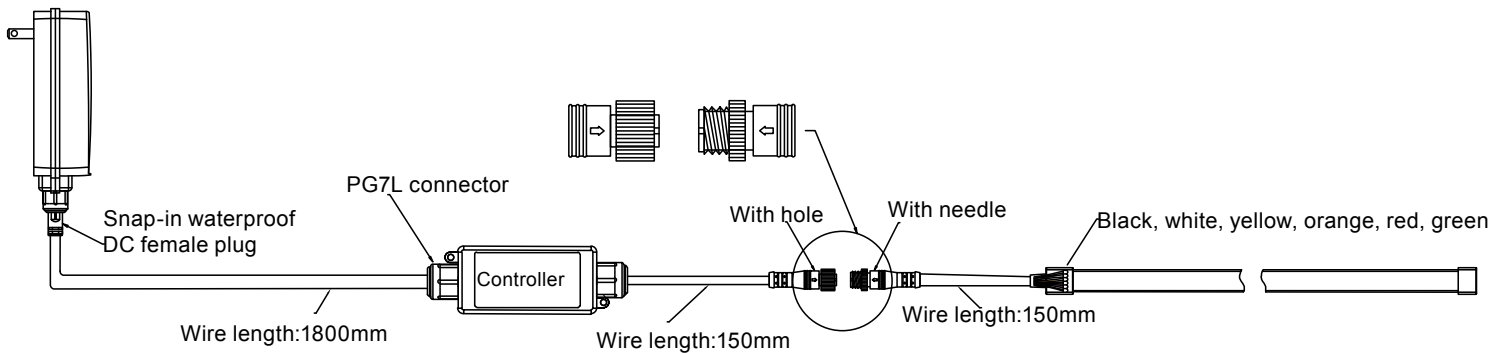

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

DIMENSION PLUS

INDOOR LED SMART TAPE LIGHT KIT



STARFISH™
Controlled with App



Unlock a world of possibilities with DIMENSION Plus, the versatile tape light designed for residential lighting and more. Choose from millions of vibrant colors or create the perfect ambiance. Sync the lighting to your favorite soundtrack and elevate your gaming experience or transform your living space. With its user-friendly features and top-notch quality, DIMENSION Plus brings a touch of magic to any setting.



**STARFISH™ SMART
ENABLED PRODUCT**

**DYNAMIC RGB,
COLOR-CHANGING
& TUNABLE WHITE**

**PRE-SET & CUSTOM
COLOR-CHANGING EFFECTS**


**IR REMOTE CONTROL
OR APP CONTROLLED**

16FT KITS AVAILABLE

**PLUG-IN OR
DIRECT-WIRE KITS**

CUTTABLE & LINKABLE

SUGGESTED APPLICATIONS:
Commercial or Decorative
Residential Applications

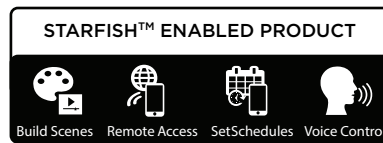

*Via App or Remote



GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Dry (Indoor Only)

Wired Controller: Yes

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cut to Length: Yes

Dimmable: Yes, Dimmable with App or Remote

Warranty: 1 Year

Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-120	16'	Plug In	120V	24V	12W	1120L	1	045923640278
64-121	16'	Direct Wired	120V-277V	24V	14W	1120L	1	045923640285

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire Junction Box



Controller/Receiver



IR Remote



Single Reel for
64/120 and 64/121 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	Qty/ Pcs	UPC
Tape Extension and Connectors			
Tape to Tape			
64/160	Tape-to-Tape Connector	5	045923644788
64/161	6" Jumper Wire	5	045923644795
64/162	90° Connector	5	045923644801
Wire to Tape			
64/164	Wire to Tape Connector	6	045923644177
64/165	50' Tape Wire	1	045923644184
Channels and Diffusers			
Recessed			
64/150	Recessed Deep Channel and Diffuser	5	045923644733
Surface			
64/151	Deep Channel and Diffuser	5	045923644740
64/154	Shallow Channel and Diffuser	5	045923644771
Corner			
64/152	45° Corner Channel and Diffuser	5	045923644757



64-164



64-160



64-165



64-162



64-161



64-154



64-152



64-151



64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS

64/120 | 64/121



DRIVER CONNECTION DIAGRAMS

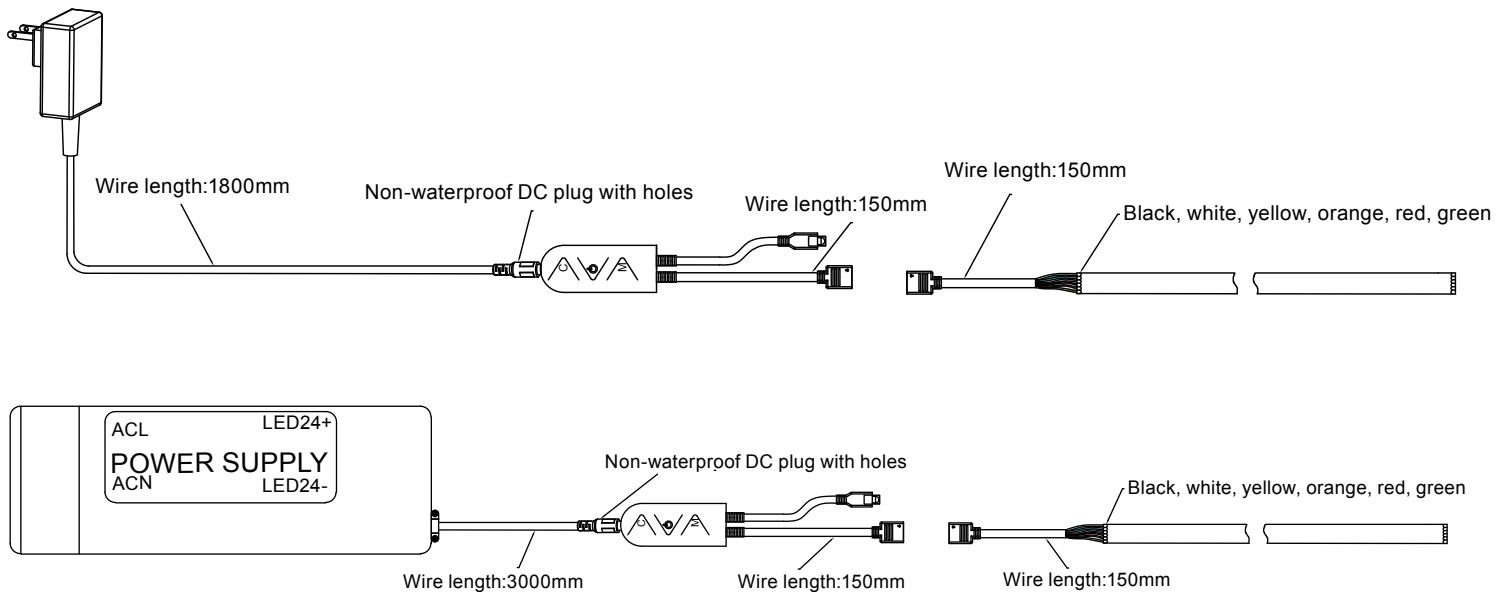

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

DIMENSION PERFORMER

INDOOR LED TAPE LIGHT KIT



**COLOR-CHANGING
& TUNABLE WHITE**

IR REMOTE CONTROL

16FT KITS AVAILABLE

**PLUG-IN OR
DIRECT-WIRE KITS**

CUTTABLE & LINKABLE

SUGGESTED APPLICATIONS:

Bedrooms, Mirror Backlighting,
Shelving, Game Rooms,
Picture Frames, Office Decor



Millions of Colors



Warm to Cool Tunable White



Transform your space effortlessly with DIMENSION Plus, the ideal tape light for easy installation and instant atmosphere. With its user-friendly design, this tape light is perfect for those seeking a hassle-free way to enhance their surroundings. Add a touch of ambiance to any space with DIMENSION Plus, and effortlessly elevate the mood and atmosphere of your environment.



*Via Remote

GENERAL SPECIFICATIONS

Color: RGBTW

CRI: 80

Functional Life: 50,000 Hours

Location Rating: Dry (Indoor Only)

Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)

Cut to Length: Yes

Dimmable: Yes, Dimmable with Remote

Warranty: 1 Year

Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-110	16'	Plug In	120V	24V	12W	1120L	1	045923640254
64-111	16'	Direct Wired	120V-277V	24V	14W	1120L	1	045923640261

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



Direct Wire Junction Box



IR Remote



Receiver



Single Reel for
64/110 and 64/111 Kits

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

OPTIONAL ACCESSORIES

Item	Description	Qty/ Pcs	UPC
Tape Extension and Connectors			
Tape to Tape			
64/160	Tape-to-Tape Connector	5	045923644788
64/161	6" Jumper Wire	5	045923644795
64/162	90° Connector	5	045923644801
Wire to Tape			
64/164	Wire to Tape Connector	6	045923644177
64/165	50' Tape Wire	1	045923644184
Channels and Diffusers			
Recessed			
64/150	Recessed Deep Channel and Diffuser	5	045923644733
Surface			
64/151	Deep Channel and Diffuser	5	045923644740
64/154	Shallow Channel and Diffuser	5	045923644771
Corner			
64/152	45° Corner Channel and Diffuser	5	045923644757



64-164



64-160



64-165



64-162



64-161



64-154



64-152



64-151



64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAMS

64/110 | 64/111



DRIVER CONNECTION DIAGRAMS

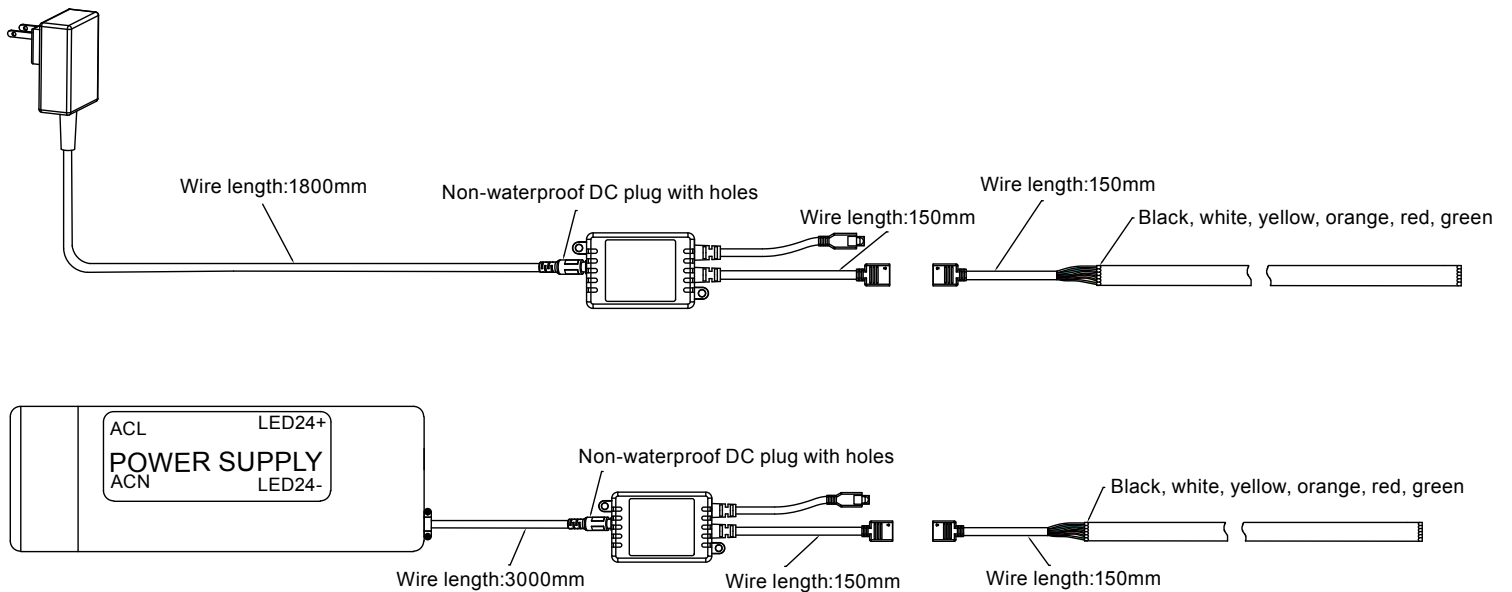

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

DIMENSION COLOR

INDOOR LED TAPE LIGHT KIT



DYNAMIC COLOR CHANGING

IR REMOTE CONTROL

16FT KIT AVAILABLE

PLUG-IN KIT

SUGGESTED APPLICATIONS:

Bedrooms, Mirror Backlighting,
Shelving, Picture Frames,
Office Decor



RGB



Add a vibrant splash of color to your space with DIMENSION Color, the perfect tape light for those seeking an easy and playful lighting solution. Designed with simplicity in mind, this RGB tape light is ideal for kids and anyone looking to infuse their environment with a burst of vivid hues. Let DIMENSION Color bring joy and excitement to your space as you effortlessly create a colorful and lively atmosphere.



*Via Remote

GENERAL SPECIFICATIONS

Color: RGB
CRI: 80
Functional Life: 50,000 Hours
Location Rating: Dry (Indoor Only)
Wired Controller: No

Ambient Operating Temperature: -20°C (-4°F) to +40°C (+104°F)
Dimmable: Yes, Dimmable with Remote
Warranty: 1 Year
Remote: IR

ITEM SPECIFICATIONS / ORDER INFO



Item	Length	Style	Input Voltage	DC Voltage	Watts	Lumens	Number of Reels	UPC
64-100	16'	Plug In	120V	24V	12W	1120L	1	045923640254

ACCESSORIES INCLUDED IN KITS



Plug-In Driver



IR Remote



Receiver



Single Reel for 64/110 and 64/111 Kits

OPTIONAL ACCESSORIES

Item	Description	Qty/ Pcs	UPC
Channels and Diffusers			
Recessed			
64/150	Recessed Deep Channel and Diffuser	5	045923644733
Surface			
64/151	Deep Channel and Diffuser	5	045923644740
64/154	Shallow Channel and Diffuser	5	045923644771
Corner			
64/152	45° Corner Channel and Diffuser	5	045923644757



64-154



64-152



64-151



64-150

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.


Specifications are subject to change without prior notice.

TAPE LIGHT DIMENSIONAL DIAGRAM

64/100





DRIVER CONNECTION DIAGRAM

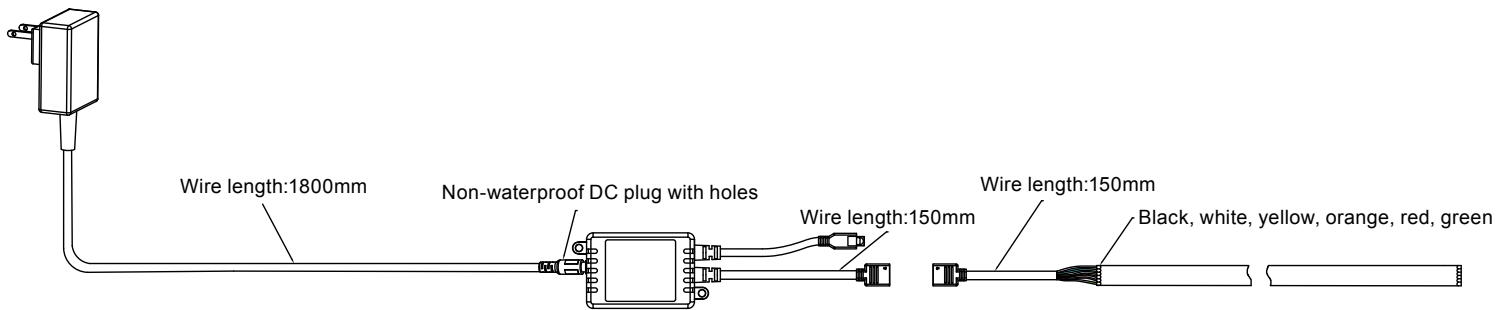

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Fixture may not be compatible with all dimmers.

Specifications are subject to change without prior notice.

To learn more about SATCO|NUVO, visit www.satco.com or contact 1-800-437-2826



National Toll-Free: 1.800.43.SATCO (1.800.437.2826)

Corporate Offices &

Distribution Center: **NEW YORK** 110 Heartland Blvd., Brentwood, NY 11717 | 800.437.2826 | 631.243.2022 | Fax 631.243.2027

Distribution Centers: **FLORIDA** 1694 NW 215th St. Miami Gardens, FL 33056 | Tel. 305.624.2044 FAX 305.623.0286

CALIFORNIA 31288 San Benito St. Hayward, CA 94544 | Tel. 510.487.4822 FAX 510.487.8955

WASHINGTON 4710 116th St. S.W., Mukilteo, WA 98275 | Tel. 425.789.3300 FAX 425.789.3310

TEXAS 2000 Valwood Parkway, Farmers Branch, TX 75234 | Tel. 972.247.2437 FAX 972.247.5408

PUERTO RICO Campeche St. 23, Julio N. Matos Industrial Park, Carolina, PR 00984 | Tel. 787.757.3510 FAX 787.757.3540

Product specifications and availability are subject to change without notice. Please visit us online at www.satco.com for our full product line and ordering details.