



**MORRIS**

***SINGLE SOURCE...  
ELECTRICAL & LIGHTING***

***LIGHTING***

***2023 / 2024***




# MORRIS PRODUCTS

was founded in 1994, in Queensbury, NY. Originally created as a supplier of electrical products – wiring devices, lugs and connectors, cable ties and other accessories – Morris' mission was, and remains, to serve the needs of electrical distributors. With a staff of 2 office workers, and 2 warehouse workers, Morris Products soon outgrew its small location, and expanded to a much larger facility in the late 1990s. With that growth, Morris Products expanded with the addition of a full offering of wire management products, compression and mechanical connectors, conduit fittings, and LED Lighting. In 2016, Morris was acquired by DiversiTech Corporation, adding to a strong family of brands for the electrical and HVAC markets.

**SINGLE SOURCE...**  
**ELECTRICAL & LIGHTING**

Today, Morris Products operates out of a state-of-the-art 65,000 square foot facility in Queensbury, NY, and offers electrical distributors more than 8,000 items in inventory, spanning 30 product categories. In addition to the main facility, MORRIS supplies electrical wholesalers from their west coast warehouse in Adelanto, CA, as well as numerous regional rep warehouses.

As a company, we maintain a laser focus on customer service with same day/next day shipping, allowing broken cartons, and no minimum orders. Experience the Morris Advantage, and let us earn your business.

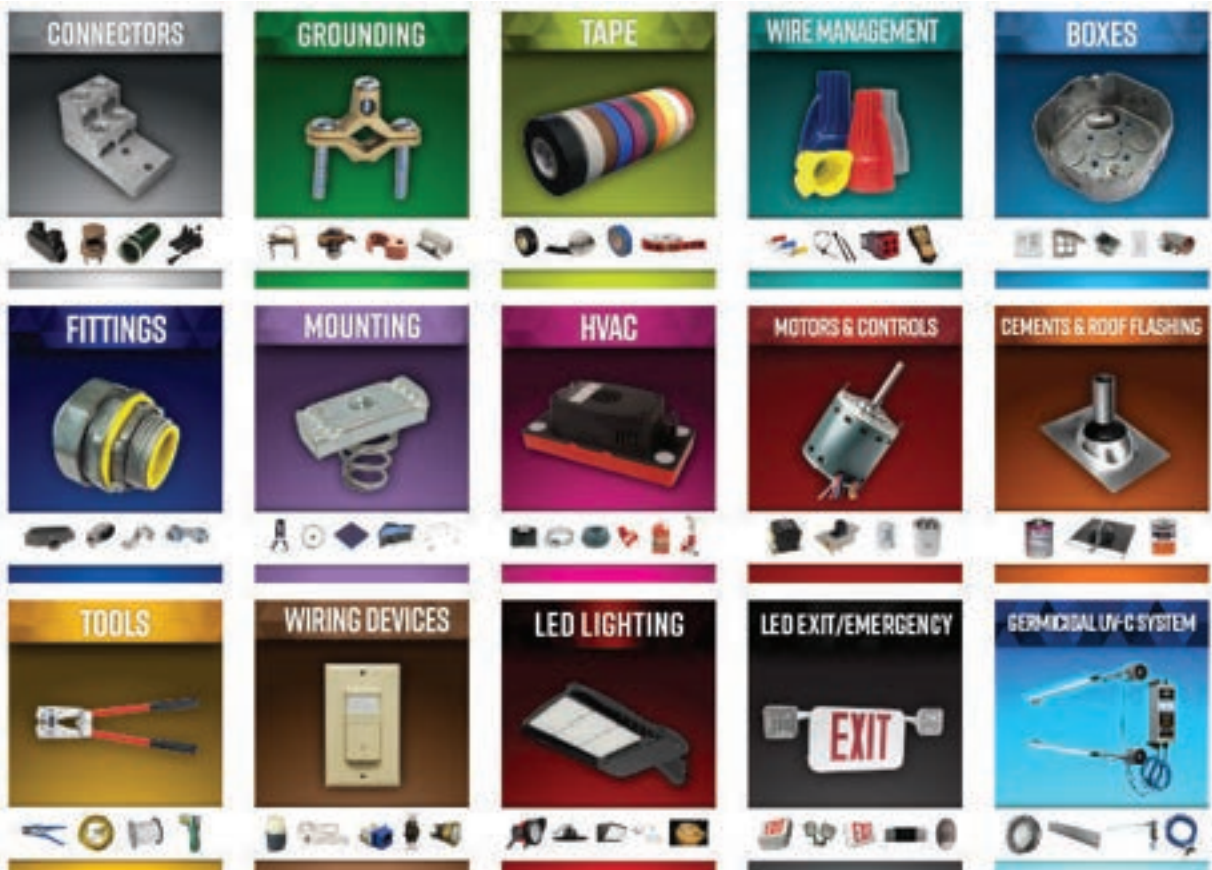



**AREA LIGHTS**

*1-2*



**WALLPACKS /  
CANOPIES**

*4-7*



**BOLLARDS**

*8*



**SPORTS  
LIGHTING**

*9-10*



**FLOODS /  
SECURITY**

*11-16*



**ENTRYWAY**

*17-18*



**PHOTOCELLS**

*19-20*



**HIGH BAYS**

*21-23*



**PANELS /  
TROFFERS**

*24-25*



**VAPORTIGHT /  
WRAPS**

*25-29*



**DOWNLIGHTING /  
RETROFITS**

*31-37*



**BATH FANS**

*39-40*



**EXIT &  
EMERGENCY**

*47-53*



# AREA-LIGHT SHOEBOX



**120-277V  
5000K  
BRONZE**

- 120-277V
- Dimming: 0-10V
- Corrosion Resistant Die Cast Aluminum Housing
- GKV Surge Protection
- Polycarbonate Lens
- IP65 Rated
- DLC Listed
- cULus Listed

	CAT. NO.	PRIOR CAT. NO.	LIGHT PATTERN	WATTS	VOLTS	COLOR TEMP	HOUSING COLOR	LUMENS	LM/W	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
<b>TYPE III, IV &amp; V LIGHT PATTERN (FIXTURE ONLY - ORDER MOUNTS SEPARATELY)</b>												
<b>80W</b>	74079C	74079A	III	80W	120-277V	5000K	BRONZE	11,527	144	175W	7.9	1
	74080C	74080A	IV	80W	120-277V	5000K	BRONZE	11,915	147	175W	7.9	1
	74045C	74045A	V	80W	120-277V	5000K	BRONZE	11,416	141	175W	7.9	1
<b>100W</b>	74002C	74002A	III	100W	120-277V	5000K	BRONZE	14,242	142	250W	7.9	1
	74003C	74003A	IV	100W	120-277V	5000K	BRONZE	14,096	141	250W	7.9	1
	74050C	74050A	V	100W	120-277V	5000K	BRONZE	13,765	137	250W	7.9	1
<b>150W</b>	74010C	74010A	III	150W	120-277V	5000K	BRONZE	21,606	144	400W	9.9	1
	74011C	74011A	IV	150W	120-277V	5000K	BRONZE	20,580	139	400W	9.9	1
	74053C	74053A	V	150W	120-277V	5000K	BRONZE	20,977	139	400W	9.9	1
<b>200W</b>	74056C	74056A	III	200W	120-277V	5000K	BRONZE	27,640	138	600W	9.9	1
	74058C	74058A	IV	200W	120-277V	5000K	BRONZE	26,647	134	600W	9.9	1
	74060C	74060A	V	200W	120-277V	5000K	BRONZE	26,842	134	600W	9.9	1
<b>240W</b>	74018C	74018A	III	240W	120-277V	5000K	BRONZE	35,298	147	750W	12	1
	74019C	74019A	IV	240W	120-277V	5000K	BRONZE	34,463	145	750W	12	1
	74066C	74066A	V	240W	120-277V	5000K	BRONZE	33,809	141	750W	12	1
<b>300W</b>	74026C	74026B	III	300W	120-277V	5000K	BRONZE	44,053	146	1000W	12	1
	74027C	74027B	IV	300W	120-277V	5000K	BRONZE	40,452	134	1000W	12	1
	74069C	74069B	V	300W	120-277V	5000K	BRONZE	42,083	140	1000W	12	1

**FOR 480V, 4000K OR WHITE HOUSING SEE TABLE BELOW**

# WATTAGE SELECTABLE AREA-LIGHT SHOEBOX



- 120-277V
- Dimming: 0-10V
- Corrosion Resistant Die Cast Aluminum Housing
- GKV Surge Protection
- Polycarbonate Lens
- IP65 Rated
- DLC Listed
- cULus Listed

	CAT. NO.	PRIOR CAT. NO.	LIGHT PATTERN	WATTS	VOLTS	COLOR TEMP	HOUSING COLOR	LUMENS @ MAX WATTS	LM/W	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
<b>TYPE III, IV &amp; V LIGHT PATTERN (FIXTURE ONLY - ORDER MOUNTS SEPARATELY)</b>												
<b>4000K</b>	74000C	74000A, 74074A	III	60W/80W/100W	120-277V	4000K	BRONZE	14,037	140	150W-250W	7.9	1
	74001C	74001A	IV	60W/80W/100W	120-277V	4000K	BRONZE	13,847	138	150W-250W	7.9	1
	74052C	74052A	V	60W/80W/100W	120-277V	4000K	BRONZE	13,569	135	150W-250W	7.9	1
	74008C	74008A, 74063A	III	150W/200W	120-277V	4000K	BRONZE	27,351	137	400W-600W	9.9	1
	74009C	74009A, 74046A	IV	150W/200W	120-277V	4000K	BRONZE	26,339	132	400W-600W	9.9	1
	74055C	74055A, 74065A	V	150W/200W	120-277V	4000K	BRONZE	26,552	133	400W-600W	9.9	1
	74024C	74016A, 74024B	III	240W/300W	120-277V	4000K	BRONZE	43,697	145	750W-1,000W	12	1
	74017C	74017A, 74025B	IV	240W/300W	120-277V	4000K	BRONZE	39,915	132	750W-1,000W	12	1
	74071C	74068A, 74071B	V	240W/300W	120-277V	4000K	BRONZE	41,647	138	750W-1,000W	12	1
<b>WHITE HOUSING</b>	74046C	74004A, 74046A	III	60W/80W/100W	120-277V	5000K	WHITE	14,242	142	150W-250W	7.9	1
	74005C	74005A	IV	60W/80W/100W	120-277V	5000K	WHITE	14,096	138	150W-250W	7.9	1
	74086C		V	60W/80W/100W	120-277V	5000K	WHITE	13,765	137	150W-250W	7.9	1
	74012C	74012A, 74062A	III	150W/200W	120-277V	5000K	WHITE	27,640	138	400W-600W	9.9	1
	74013C	74013A	IV	150W/200W	120-277V	5000K	WHITE	26,647	134	400W-600W	9.9	1
	74087C		V	150W/200W	120-277V	5000K	WHITE	26,842	134	400W-600W	9.9	1
	74028C	74020A, 74028A	III	240W/300W	120-277V	5000K	WHITE	44,053	146	750W-1,000W	12	1
	74029C	74021A, 74029A	IV	240W/300W	120-277V	5000K	WHITE	40,452	134	750W-1,000W	12	1
	74082C		V	240W/300W	120-277V	5000K	WHITE	42,083	141	750W-1,000W	12	1
<b>480V</b>	74014C	74014A, 74057A	III	150W/200W	347-480V	5000K	BRONZE	28,100	138	400W-600W	9.9	1
	74015C	74015A, 74059A	IV	150W/200W	347-480V	5000K	BRONZE	27,507	135	400W-600W	9.9	1
	74054C	74054A, 74061A	V	150W/200W	347-480V	5000K	BRONZE	27,814	136	400W-600W	9.9	1
	74030C	74022A, 74030B	III	240W/300W	347-480V	5000K	BRONZE	42,806	145	750W-1,000W	12	1
	74031C	74023A, 74031B	IV	240W/300W	347-480V	5000K	BRONZE	43,008	144	750W-1,000W	12	1
	74070C	74067A, 74070B	V	240W/300W	347-480V	5000K	BRONZE	42,262	141	750W-1,000W	12	1



# COLOR & WATTAGE SELECTABLE AREA-LIGHT SHOEBOX



- 120-277V
- Dimming: 0-10V
- Corrosion Resistant Die Cast Aluminum Housing
- 6KV Surge Protection
- Polycarbonate Lens
- IP65 Rated
- DLC Listed
- cULus Listed



CAT. NO.	LIGHT PATTERN	WATTS	VOLTS	COLOR TEMP	HOUSING COLOR	LUMENS @ MAX WATTS	LM/W	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
<b>TYPE III LIGHT PATTERN (FIXTURE ONLY - ORDER MOUNTS SEPARATELY)</b>										
74088	III	60W 80W 100W	120-277V	3000K 4000K 5000K	BRONZE	13,586	132	150W-250W	4.4	1
74089	III	150W 200W	120-277V	3000K 4000K 5000K	BRONZE	25,515	122	400W-600W	5.4	1

## AREA-LIGHT MOUNTS & ACCESSORIES



FIG. 1



FIG. 2



FIG. 3



FIG. 4



FIG. 5



FIG. 6

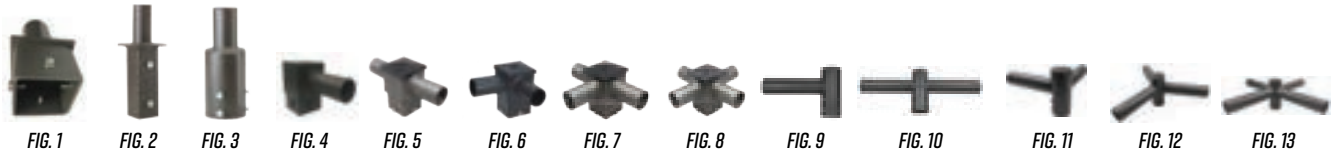


FIG. 7

CAT. NO.	FIG.	DESCRIPTION	CASE QTY
74072C	1	MICROWAVE MOTION SENSOR 120-277 & 480V	100
74188B	-	MICROWAVE MOTION SENSOR REMOTE (OPTIONAL, FOR USE WITH 74072C)	100
74032A	2	POLE ARM MOUNT 60W-300W BRONZE (FOR ROUND OR SQUARE POLES)	6
74033A	2	POLE ARM MOUNT 60W-300W WHITE (FOR ROUND OR SQUARE POLES)	6
74034A	3	SLIPFITTER MOUNT 60W-300W BRONZE	6
74035A	3	SLIPFITTER MOUNT 60W-300W WHITE	6
74038C	4	TRUNNION MOUNT 60W-300W BRONZE	10
74039C	4	TRUNNION MOUNT 60W-300W WHITE	10
74043A	5	UNIVERSAL MOUNT 60W-300W BRONZE	10
74044A	5	UNIVERSAL MOUNT 60W-300W WHITE	10
74733C	6	YOKE FULL BRACKET MOUNT 60W-100W BRONZE	10
74734C	6	YOKE FULL BRACKET MOUNT 60W-100W WHITE	10
74036C	6	YOKE FULL BRACKET MOUNT 150W-200W BRONZE	10
74037C	6	YOKE FULL BRACKET MOUNT 150W-200W WHITE	10
74737C	6	YOKE FULL BRACKET MOUNT 240W-300W BRONZE	10
74738C	6	YOKE FULL BRACKET MOUNT 240W-300W WHITE	10
75092C	7	GLARE SHIELD 60W-100W BRONZE	16
75093C	7	GLARE SHIELD 150W-200W BRONZE	16
75089C	7	GLARE SHIELD 240W-300W BRONZE	16




# POLE TOP TENON MOUNTING ACCESSORIES *ALL MOUNTING ACCESSORIES ARE POWDER COATED BRONZE FINISH*



CAT. NO.	FIG.	TYPE	POLE SIZE	APPLICATION	WEIGHT CAPACITY (LBS)	EPA RATING	WEIGHT (LBS)	CASE QTY
79912	1	SQUARE SHORT TENON	4"	SQUARE POLE	100	.15	5.5	6
79913	1	SQUARE SHORT TENON	5"	SQUARE POLE	100	.15	5.6	6
79914	2	SQUARE LONG TENON	3"	SQUARE POLE	100	.16	5.7	4
79915	2	SQUARE LONG TENON	4"	SQUARE POLE	100	.16	5.7	4
79916	2	SQUARE LONG TENON	5"	SQUARE POLE	100	.16	6.5	4
79917	3	ROUND LONG TENON	3"	ROUND POLE	100	.26	5	4
79918	3	ROUND LONG TENON	4"	ROUND POLE	100	.26	6.3	4
79919	3	ROUND LONG TENON	5"	ROUND POLE	100	.30	7.6	4
79922	4	90° SQUARE BRACKET	4"	POLE TOP - 1 TENON	60	.20	5.9	4
79923	4	90° SQUARE BRACKET	5"	POLE TOP - 1 TENON	60	.27	6.6	4
79926	5	90° SQUARE BRACKET	4"	POLE TOP - 2 TENON OPPOSITE	60	.26	6.6	4
79927	5	90° SQUARE BRACKET	5"	POLE TOP - 2 TENON OPPOSITE	60	.34	7.5	4
79930	6	90° SQUARE BRACKET	4"	POLE TOP - 2 TENON 90°	60	.20	6.4	4
79931	6	90° SQUARE BRACKET	5"	POLE TOP - 2 TENON 90°	60	.27	7.5	4
79934	7	90° SQUARE BRACKET	4"	POLE TOP - 3 TENON 90°	60	.26	7.6	4
79935	7	90° SQUARE BRACKET	5"	POLE TOP - 3 TENON 90°	60	.34	8.4	4
79938	8	90° SQUARE BRACKET	4"	POLE TOP - 4 TENON 90°	60	.26	8.4	4
79939	8	90° SQUARE BRACKET	5"	POLE TOP - 4 TENON 90°	60	.34	9.3	4
79951	9	ROUND SINGLE STRAIGHT ARM	2-3/8" SLIPFITTER	ROUND POLE TOP - 1 TENON	35	0.4	4.4	1
79953	10	180° ROUND VERTICAL TENNON	2-3/8" SLIPFITTER	ROUND POLE TOP - 2 TENON - OPPOSITE	70	0.4	6	1
79955	11	90° ROUND DOUBLE STRAIGHT ARM	2-3/8" SLIPFITTER	ROUND POLE TOP - 2 TENON - 90°	70	0.6	7	1
79957	12	120° ROUND TRIPLE STRAIGHT ARM	2-3/8" SLIPFITTER	ROUND POLE TOP - 3 TENON - 120°	105	0.7	9	1
79959	13	90° ROUND QUAD STRAGHT ARM	2-3/8" SLIPFITTER	ROUND POLE TOP - 4 TENON - 90°	141	1.3	11	1

## ROUND POLE BULLHORNS



CAT. NO.	FIG.	TYPE	SIZE	APPLICATION	FINISH	WEIGHT CAPACITY (LBS)	EPA RATING	WEIGHT (LBS)
79960	1	ROUND 2 TENON HORIZONTAL BULLHORN	2-3/8" TENON	POLE/TENON MOUNT	BRONZE POWDER COAT	70	1.0	29
79952	2	ROUND 2 TENON VERTICAL BULLHORN	2-3/8" TENON	POLE/TENON MOUNT	BRONZE POWDER COAT	100	1.0	29
79954	3	ROUND 3 TENON VERTICAL BULLHORN	2-3/8" TENON	POLE/TENON MOUNT	BRONZE POWDER COAT	100	1.6	34

## SQUARE POLE BULLHORNS



CAT. NO.	FIG.	TYPE	SIZE	APPLICATION	FINISH	WEIGHT CAPACITY (LBS)	EPA RATING	WEIGHT (LBS)
79944A	1	4" SQUARE 2 TENON 180° BULLHORN	4" POLE TO 2-3/8" TENON	POLE MOUNT	BRONZE POWDER COAT	60	1	29
79946A	2	4" SQUARE 3 TENON 180° BULLHORN	4" POLE TO 2-3/8" TENON	POLE MOUNT	BRONZE POWDER COAT	60	1.7	30
79945A	3	4" SQUARE 4 TENON 180° BULLHORN	4" POLE TO 2-3/8" TENON	POLE MOUNT	BRONZE POWDER COAT	60	2.4	30
79950A	4	4" SQUARE 4 ARM 90° BULLHORN	4" POLE TO 2-3/8" TENON	POLE MOUNT	BRONZE POWDER COAT	60	1.3	13
79947A	5	3" POLE TO 4" BULLHORN ADAPTOR	3" TO 4"	POLE MOUNT	BRONZE POWDER COAT	100	N/A	2
79949A	5	5" POLE TO 4" BULLHORN ADAPTOR	5" TO 4"	POLE MOUNT	BRONZE POWDER COAT	100	N/A	2

## MOUNTING ACCESSORIES



CAT. NO.	FIG.	TYPE	SIZE	APPLICATION	FINISH	WEIGHT CAPACITY (LBS)	EPA RATING	WEIGHT (LBS)	CASE QTY
79903	1	SHORT STRAIGHT BRACKET	4"	WALL MOUNT	BRONZE POWDER COAT	60	.07	3.7	4
79904	2	LONG STRAIGHT BRACKET	8"	WALL MOUNT	BRONZE POWDER COAT		.18	4.7	4
79905	3	HINGED BRACKET	8"	WALL MOUNT	BRONZE POWDER COAT		.18	6.3	4
79907	4	90° SWEEP BRACKET	8"	90° WALL MOUNT	BRONZE POWDER COAT	60	.34	8.2	4
79908	5	90° BRACKET	8"	90° WALL MOUNT	BRONZE POWDER COAT	60	.22	6.3	4

Mounting / Bullhorns



- 0-10V Dimming
- Photocell included
- Voltage: 120-277V
- Die Cast Aluminum Housing
- Heat Resistant Optics
- DLC Listed
- cETLus Listed

# CLASSIC WALLPACKS WITH PHOTOCELL



CAT. NO.	PRIOR CAT. NO.	WATTS	COLOR TEMP	VOLTS	HOUSING COLOR	LUMENS	REPLACES METAL HALIDE	CASE QTY
<b>SMALL WALLPACKS 9" WIDTH</b>								
71435D	71435C	30W	5000K	120-277V	BRONZE	4,184	100W	4
71436D	71436C	30W	5000K	120-277V	WHITE	4,184	100W	4
71630D	71630C	30W	4000K	120-277V	BRONZE	3,714	100W	4
<b>71637D</b>	<b>71637C</b>	<b>45W</b>	5000K	120-277V	BRONZE	5,780	150W	4
<b>MEDIUM WALL PACKS 14" WIDTH</b>								
71437D	71437C	45W	5000K	120-277V	BRONZE	5,685	150W	1
71631D	71631C	45W	4000K	120-277V	BRONZE	5,539	150W	1
71425D	71425C	60W	5000K	120-277V	BRONZE	7,919	175W	1
71428D	71428C	60W	5000K	120-277V	WHITE	7,919	175W	1
71426D	71426C	75W	5000K	120-277V	BRONZE	9,394	250W	1
71429D	71429B	75W	5000K	120-277V	WHITE	9,394	250W	1
71431D	71431C	90W	5000K	120-277V	BRONZE	11,345	300W	1
<b>71472D</b>	<b>71472C</b>	<b>120W</b>	5000K	120-277V	BRONZE	14,764	400W	1
71424D	71424B	60W	5000K	<b>347-480V</b>	BRONZE	8,042	175W	1
71449D	71449C	75W	5000K	<b>347-480V</b>	BRONZE	9,514	250W	1
<b>ACCESSORIES (MEDIUM WALLPACKS ONLY)</b>								
71465C	-	EMERGENCY BACKUP FOR 45W-60W 120-277V MEDIUM WALLPACKS						1
71470C	-	EMERGENCY BACKUP FOR 75W-120W 120-277V MEDIUM WALLPACKS						1
71461B	71427	SEMI-CUTOFF VISOR BRONZE						8
71430B	-	SEMI-CUTOFF VISOR WHITE						8
71427C	-	FULL CUTOFF VISOR BRONZE						10
71459B	-	WIRE GUARD						10
71473B	-	COVERAGE PLATE - FOR USE WITH 71472D 120W MEDIUM WALLPACK						
<b>LARGE WALLPACKS 18" WIDTH</b>								
71440D	71440C	120W	5000K	120-277V	BRONZE	15,721	400W	1
71441D	71441C	120W	5000K	120-277V	WHITE	15,721	400W	1
71450D	71450C	120W	5000K	<b>347-480V</b>	BRONZE	15,251	400W	1
<b>ACCESSORIES (LARGE WALLPACKS ONLY)</b>								
71470C	-	EMERGENCY BACKUP FOR 120W 120-277V LARGE WALLPACKS						1
71463B	71442	SEMI-CUTOFF VISOR BRONZE						8
71443B	71443	SEMI-CUTOFF VISOR WHITE						8
71442C	-	FULL CUTOFF VISOR BRONZE						10
71460B	-	WIRE GUARD						10



# COLOR & WATTAGE SELECTABLE WALLPACKS WITH PHOTOCELL



- 0-10V Dimming
- Photocell included
- Voltage: 120-277V
- Die Cast Aluminum Housing
- Heat Resistant Optics
- DLC Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	WATTS	COLOR TEMP	VOLTS	HOUSING COLOR	LUMENS @ 4K	REPLACES METAL HALIDE	CASE QTY
<b>MEDIUM WALLPACKS - COLOR &amp; WATTAGE SELECTABLE 14" WIDTH</b>								
71475D	71475C	36W 45W 60W	3000K 4000K 5000K	120-277V	BRONZE	8,455	100W-175W	1
71477D	71477C	60W 75W 90W	3000K 4000K 5000K	120-277V	WHITE	10,973	175W-400W	1
<b>ACCESSORIES</b>								
71461B	-	SEMI-CUTOFF VISOR BRONZE						8
71430B	-	SEMI-CUTOFF VISOR WHITE						8
71427C	-	FULL CUTOFF VISOR BRONZE						10
71459B	-	WIRE GUARD						10



# CLASSIC FULL CUTOFF WALLPACKS



- 0-10V Dimming
- Voltage: 120-277V
- Die Cast Aluminum Housing
- High Quality Tempered Glass Lens
- DLC Listed
- cETLus listed

CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	HOUSING COLOR	LUMENS	REPLACE METAL HALIDE	DIMENSIONS			CASE QTY
							W	H	D	
71452C	71452B	45W	120-277V	BRONZE	5,580	150W	13"	9-1/4"	11-1/4"	1
71451C	71451B	60W	120-277V	BRONZE	7,038	175W	13"	9-1/4"	11-1/4"	1
71454C	71454	75W	120-277V	BRONZE	8,840	250W	13"	9-1/4"	11-1/4"	1
71457C	71457B	90W	120-277V	BRONZE	11,103	400W	13"	9-1/4"	11-1/4"	1

# SLIM-LINE FLOOD / WALLPACK



FIG. 1



FIG. 2

- Color Temp: 5000K
- Voltage: 120-277V
- Die Cast Aluminum housing
- Hinged Bracket - 0-90° Angle Tilt Adjustment
- DLC Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	FIG.	WATTS	VOLTS	HOUSING COLOR	LUMENS	REPLACES METAL HALIDE	LENGTH	HEIGHT	DEPTH (WI)	WEIGHT (LBS)	CASE QTY
71150A	71150	1	15W	120-277V	BRONZE	2,044	60W	8"	4-7/8"	7-1/4"	3.9	1
71151A	71151	1	15W	120-277V	WHITE	2,044	60W	8"	4-7/8"	7-1/4"	3.9	1
71152A	71152	1	30W	120-277V	BRONZE	4,008	100W	8"	4-7/8"	7-1/4"	9.9	1
71154A	71154	1	50W	120-277V	BRONZE	6,548	150W	10-5/8"	6-5/8"	10"	3.9	1
71155A	71155	1	50W	120-277V	WHITE	6,548	150W	10-5/8"	6-5/8"	10"	3.9	1
71156A	71156	1	70W	120-277V	BRONZE	9,222	250W	10-5/8"	6-5/8"	10"	9.9	1
71158B	71158A	2	120W	120-277V	BRONZE	16,200	400W	13"	8"	14-3/8"	14	1



- Voltage: 120-277V
- Die Cast Aluminum Backplate with PC Housing and Lens
- DLC Listed
- cETLus listed

## COLOR & WATTAGE SELECTABLE



## CLASSIC MINI WALLPACK

CAT. NO.	PHOTOCELL	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS @ MAX WATTS	REPLACES METAL HALIDE	CASE QTY
71423B	YES	10W	120-277V	BRONZE	3000K	3,450	50W-100W	6
		20W			4000K			
		30W			5000K			
71419B	YES	10W	120-277V	WHITE	3000K	3,450	50W-100W	6
		20W			4000K			
		30W			5000K			



- Photoeye included
- Voltage: 120-277V
- Die Cast Aluminum Housing
- DLC Listed
- cULus Listed



## COLOR SELECTABLE

## ARCHITECTURAL MINI WALLPACK

CAT. NO.	PHOTOCELL	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	CASE QTY
71590B	YES	15	120-277V	BRONZE	3000K 4000K 5000K	2,129 @ 5K	50W	10
71591B	YES	20	120-277V	BRONZE	3000K 4000K 5000K	2,599 @ 5K	70W	10
71592B	YES	30	120-277V	BRONZE	3000K 4000K 5000K	3,947 @ 5K	100W	10



- Photocell Included
- Voltage: 120-277V
- Die Cast Aluminum Housing and Mounting Plate
- Polycarbonate Frosted Lens
- DLC Listed
- cETLus listed



## DESIGNER MINI WALLPACK

CAT. NO.	PHOTOCELL	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	CASE QTY
71516B	YES	13W	120-277V	BRONZE	4000K	1,591	50W	12
71517B	YES	13W	120-277V	WHITE	4000K	1,591	50W	12
71518B	YES	13W	120-277V	BRONZE	5000K	1,630	50W	12
71519B	YES	13W	120-277V	WHITE	5000K	1,630	50W	12
71521B	YES	18W	120-277V	BRONZE	4000K	2,151	70W	12
71523B	YES	18W	120-277V	BRONZE	5000K	2,200	70W	12
71524B	YES	18W	120-277V	WHITE	5000K	2,200	70W	12
71525B	YES	26W	120-277V	BRONZE	4000K	3,221	100W	12
71526B	YES	26W	120-277V	WHITE	4000K	3,221	100W	12
71527B	YES	26W	120-277V	BRONZE	5000K	3,221	100W	12
71528B	YES	26W	120-277V	WHITE	5000K	3,221	100W	12





**NEW**

# COLOR & WATTAGE SELECTABLE CANOPY



**DIMMABLE**  
0-10V

**DLC LISTED**

**UL LISTED**

Canopy Lighting

- 0-10V Dimmable
- Photocell Included With On/Off Switch
- IP65 Wet Location Rated
- 50,000+ Hour Life Expectancy
- DLC Listed
- cULus Listed

CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	CASE QTY
71603C	71603B	30W 40W 50W	120-277V	BRONZE	3000K 4000K 5000K	6,500	100W-150W	5
71604C	71604B	30W 40W 50W	120-277V	WHITE	3000K 4000K 5000K	6,500	100W-150W	5
71609C	71609B	45W 60W 75W	120-277V	BRONZE	3000K 4000K 5000K	9,750	150W-250W	5
71610C	71610B	45W 60W 75W	120-277V	WHITE	3000K 4000K 5000K	9,750	150W-250W	5

## ROUND ULTRATHIN CANOPY



FIG. 1



FIG. 2

**ETL LISTED**

CAT. NO.	FIG.	WATTS	VOLTS	HOUSING COLOR	PHOTOCELL INCLUDED	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	BEAM ANGLE	CASE QTY
<b>GARAGE CANOPY</b>										
71612	1	40W	120-277V	WHITE	NO	5000K	5,563	150W	169°	6
71613	1	60W	120-277V	WHITE	NO	5000K	8,164	175W	169°	6
71614	1	80W	120-277V	WHITE	NO	5000K	10,667	250W	169°	6
<b>WALKWAY CANOPY</b>										
71615	2	40W	120-277V	WHITE	NO	5000K	5,017	150W	115°	4
71616	2	60W	120-277V	WHITE	NO	5000K	7,828	175W	115°	4

## ULTRATHIN RECESSED CANOPY

SURFACE OR RECESS MOUNT GARAGE CANOPY

**DLC LISTED**

**UL LISTED**



FIXTURE SHOWN WITH RECESSED MOUNT TRIM

SOLD SEPARATELY  
CAT. NO. 71620

CAT. NO.	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	BEAM ANGLE	REPLACES METAL HALIDE	CASE QTY
71622	40W	120-277V	WHITE	5000K	4,402	148°	150W	1
71624	60W	120-277V	WHITE	5000K	6,100	153°	250W	1
<b>RECESSED MOUNT TRIM PLATE</b>								
71620	GARAGE CANOPY - RECESSED MOUNT TRIM							3

## GAS STATION/RECESSED CANOPY

**DLC LISTED**

**UL LISTED**



CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	MOUNTING	LUMENS	REPLACES METAL HALIDE	DIMENSIONS			CASE QTY
							HI	H2	W	
71413A	71413	150W	120-277V	RECESSED	21,043	600W	9-5/8"	5"	20-1/2"	1

## GAS STATION SURFACE MOUNT CANOPY

**DLC LISTED**

**UL LISTED**



CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	MOUNTING	LUMENS	REPLACES METAL HALIDE	CASE QTY
71411A	71411	120W	120-277V	SURFACE	15,802	400W	1
71412A	71412	150W	120-277V	SURFACE	19,379	600W	1
<b>ACCESSORIES</b>							
71414A	SURFACE MOUNT BRACKET						1



# COLOR & WATTAGE SELECTABLE LED BOLLARDS

- Voltage: 120-277V
- Anchor Bolts Included with Base
- Corrosion Resistant Die-Cast Aluminum Housing
- DLC Listed
- cULus Listed

**FOR ROUND BOLLARDS COMBINE ROUND BASE & ONE OF 3 ROUND TOPS FOR COMPLETE FIXTURE**



FIG. 1



TOP WITH  
BASE INCLUDED

42" HIGH  
6" WIDE



FIG. 2




TOP - 72311 TOP - 72331  
BASE 72310 BASE 72330

43-5/8" HIGH  
6" DIAMETER



FIG. 3



TOP - 72312 TOP - 72332  
BASE 72310 BASE 72330

43-5/8" HIGH  
6" DIAMETER



FIG. 4



TOP - 72313 TOP - 72333  
BASE 72310 BASE 72330

42" HIGH  
6" DIAMETER

## ANCHOR BOLTS & MOUNTING TEMPLATE INCLUDED WITH BASE

CAT. NO.	FIG.	DESCRIPTION	COLOR TEMP	WATTS	VOLTS	LUMENS @ 4,000K CCT.	HOUSING COLOR	CASE QTY
72302	1	SQUARE - BASE AND TOP	3000K 4000K 5000K	12W 16W 22W	120-277V	2,747	BRONZE	1
72322	1	SQUARE - BASE AND TOP	3000K 4000K 5000K	12W 16W 22W	120-277V	2,747	BLACK	1
72310	-	ROUND - BASE ONLY	-	-	120-277V	-	BRONZE	1
72330	-	ROUND - BASE ONLY	-	-	120-277V	-	BLACK	1
72311	2	ROUND DOME - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BRONZE	6
72331	2	ROUND DOME - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BLACK	6
72312	3	ROUND LOUVERED DOME - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BRONZE	6
72332	3	ROUND LOUVERED DOME - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BLACK	6
72313	4	ROUND FLAT - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BRONZE	6
72333	4	ROUND FLAT - TOP ONLY	3000K 4000K 5000K	12W 16W 22W	120-277V	2,923	BLACK	6



# HOT SHOT™

## GEN 2 SPORTS LIGHTER



Sports Lighting

**500W**  
FIG. 1



**750W**  
FIG. 2

REMOTE DRIVER MOUNTING  
CABLE KITS AVAILABLE  
GLARE SHIELD INCLUDED



BEFORE (HID)



AFTER (LED)



**500W SLIPFITTER  
WITH YOKE**  
( SOLD SEPARATELY )



**750W SLIPFITTER  
WITH YOKE**  
( SOLD SEPARATELY )

- Beam Adjustable up to 240° Tilt / 220° Rotation
- Voltage: 120-277V or 277-480V
- 10KV Surge Supression Standard
- DLC Listed
- cULus Listed

CAT. NO.	PRIOR CAT. NO.	FIG.	WATTS	BEAM ANGLE	VOLTS	LUMENS	DIMMING	CRI	COLOR TEMP	CASE QTY
<b>500 WATT FIXTURES</b>										
77000A	77000	1	500W	30°	120-277V	62,384	0-10V	70	5000K	1
77004A*	77004	1	500W	40°	120-277V	66,098	0-10V	70	5000K	1
77006A*	77006	1	500W	80°	120-277V	64,169	0-10V	70	5000K	1
77001A	77001	1	500W	30°	<b>277-480V</b>	68,975	0-10V	70	5000K	1
77005A*	77004	1	500W	40°	<b>277-480V</b>	65,181	0-10V	70	5000K	1
77007A*	77006	1	500W	80°	<b>277-480V</b>	67,564	0-10V	70	5000K	1
<b>750 WATT FIXTURES</b>										
77008A*	77008	2	750W	20°	120-277V	97,709	0-10V	70	5000K	1
77013A	77013	2	750W	30°	120-277V	96,497	0-10V	70	5000K	1
77015A	77015	2	750W	40°	120-277V	97,279	0-10V	70	5000K	1
77017A*	77017	2	750W	60°	120-277V	97,560	0-10V	70	5000K	1
77038A*	-	2	750W	80°	120-277V	88,412	0-10V	70	5000K	1
77009A*	77009	2	750W	20°	<b>277-480V</b>	94,824	0-10V	70	5000K	1
77014A*	77014	2	750W	30°	<b>277-480V</b>	95,971	0-10V	70	5000K	1
77016A	77016	2	750W	40°	<b>277-480V</b>	96,687	0-10V	70	5000K	1
77018A*	77018	2	750W	60°	<b>277-480V</b>	96,247	0-10V	70	5000K	1
77039A*	-	2	750W	80°	<b>277-480V</b>	89,012	0-10V	70	5000K	1
<b>ACCESSORIES</b>										
77019					LASER AIMING DEVICE					1
77020A	77020				2- 3/8" SLIPFITTER MOUNT WITH BRACKET FOR USE WITH 500W FIXTURES					1
77023A					GLARE SHIELD FOR 500W FIXTURES					1
77034A					10' REMOTE MOUNT DRIVER CABLE KIT FOR 500W FIXTURES - 2 10' CABLES INCLUDED					1
77036A					50' REMOTE MOUNT DRIVER CABLE KIT FOR 500W FIXTURES - 2 50' CABLES INCLUDED					1
77025A					2-3/8" SLIPFITTER MOUNT WITH BRACKET FOR USE WITH 750W FIXTURES					1
77024A					GLARE SHIELD FOR 750W FIXTURES					1
77035A					10' REMOTE MOUNT DRIVER CABLE KIT FOR 750W FIXTURES - 3 10' CABLES INCLUDED					1
77037A					50' REMOTE MOUNT DRIVER CABLE KIT FOR 750W FIXTURES - 3 50' CABLES INCLUDED					1

\* NOT DLC LISTED



# HOT SHOT<sup>2</sup>

AREA / SPORTS LIGHTER

## MODULAR AREA LIGHT/SPORTSLIGHT 15°, 30°, 60°, 90°, TYPE II, TYPE III DISTRIBUTIONS



**LOWER COST  
PER WATT**  
THAN TRADITIONAL SPORTS LIGHTS



**77143 - SLIPFITTER**  
FOR USE WITH  
400W & 500W SINGLE  
FIXTURES ONLY

**400W/500W**  
SINGLE FIXTURE  
( YOKE INCLUDED )

**800W/1000W**  
2 FIXTURES WITH BRACKET  
( BRACKET SOLD SEPARATLY )

**1500W**  
3 FIXTURES WITH BRACKET  
( BRACKET SOLD SEPARATLY )

CAT. NO.	WATTS	BEAM ANGLE	VOLTS	LUMENS	CRI	COLOR TEMP	CASE QTY
<b>400 WATT FIXTURES</b>							
77100	400W	30°	120-277V	51,390	73	5000K	1
77101	400W	15°	120-277V	55,067	73	5000K	1
77102	400W	60°	120-277V	51,989	73	5000K	1
77103	400W	90°	120-277V	55,067	73	5000K	1
77104	400W	TYPE II	120-277V	55,067	73	5000K	1
77105	400W	TYPE III	120-277V	55,067	73	5000K	1
77112	400W	30°	<b>200-480V</b>	50,696	73	5000K	1
77113	400W	15°	<b>200-480V</b>	55,067	73	5000K	1
77114	400W	60°	<b>200-480V</b>	53,598	73	5000K	1
77115	400W	90°	<b>200-480V</b>	55,067	73	5000K	1
77116	400W	TYPE II	<b>200-480V</b>	55,067	73	5000K	1
77117	400W	TYPE III	<b>200-480V</b>	55,067	73	5000K	1
<b>500 WATT FIXTURES</b>							
77106	500W	30°	120-277V	65,662	73	5000K	1
77107	500W	15°	120-277V	67,810	73	5000K	1
77108	500W	60°	120-277V	67,274	73	5000K	1
77109	500W	90°	120-277V	67,810	73	5000K	1
77110	500W	TYPE II	120-277V	67,810	73	5000K	1
77111	500W	TYPE III	120-277V	67,810	73	5000K	1
77118	500W	30°	<b>200-480V</b>	66,238	73	5000K	1
77119	500W	15°	<b>200-480V</b>	67,810	73	5000K	1
77120	500W	60°	<b>200-480V</b>	69,708	73	5000K	1
77121	500W	90°	<b>200-480V</b>	67,810	73	5000K	1
77122	500W	TYPE II	<b>200-480V</b>	67,810	73	5000K	1
77123	500W	TYPE III	<b>200-480V</b>	67,810	73	5000K	1
<b>ACCESSORIES</b>							
77135			2 FIXTURE MOUNTING BRACKET FOR 400W FIXTURES				1
77136			2 FIXTURE MOUNTING BRACKET FOR 500W FIXTURES				1
77137			3 FIXTURE MOUNTING BRACKET FOR 500W FIXTURES				1
77143			SLIPFITTER MOUNT FOR 400W & 500W SINGLE FIXTURES				1
77138			GLARE SHIELD FOR 400W FIXTURES				1
77139			GLARE SHIELD FOR 500W FIXTURES				1
77140			10' REMOTE MOUNT DRIVER CABLE				1
77141			50' REMOTE MOUNT DRIVER CABLE				1
77142			LASER AIMING DEVICE				1

Modular Sports Lighting



**NEW**

# COLOR SELECTABLE SMALL FLOODS



**KNUCKLE  
PRE-INSTALLED**



**YOKE MOUNT  
OPTION INCLUDED**

- 0-10V Dimmable
- Voltage: 120-277V
- On/Off Photocontrol Included
- Die Cast Aluminum Housing

- Transparent PC Lens
- DLC Listed
- UL Listed



*COLOR TEMPERATURE SELECTABLE &  
ON/OFF PHOTOCONTROL*

CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	MOUNT	HOUSING COLOR	COLOR TEMP	LUMENS @ 4K	REPLACES METAL HALIDE	CASE QTY
71531B	71531A 71551A 71552A 71802A 74073A 74076A	15W	120-277V	1/2" KNUCKLE/YOKE	BRONZE	3000K 4000K 5000K	2,130	60W	24
71553B	71553A 71801A 71803A 71821A	15W	120-277V	1/2" KNUCKLE/YOKE	WHITE	3000K 4000K 5000K	2,130	60W	24
71532B	71532A 71554A 71555A 71805A 71826 71827 74074A 74077A	30W	120-277V	1/2" KNUCKLE/YOKE	BRONZE	3000K 4000K 5000K	4,440	100W	12
71822B	71556A 71804A 71806A 71822A	30W	120-277V	1/2" KNUCKLE/YOKE	WHITE	3000K 4000K 5000K	4,440	100W	12

## COLOR & WATTAGE SELECTABLE

71533B	71533A 71557A 71808A 71824A 71829 74075A	<b>40/50/60W</b>	120-277V	1/2" KNUCKLE/YOKE	BRONZE	3000K 4000K 5000K	8,950	150W-175W	12
71823B	71807A 71809A 71823A 71825A	<b>40/50/60W</b>	120-277V	1/2" KNUCKLE/YOKE	WHITE	3000K 4000K 5000K	8,950	150W-175W	12

# ARCHITECTURAL FLOODS



FIG. 1



FIG. 2



FIG. 3



FIG. 4

- 80W - 300W are 0-10V Dimmable
- Voltage: 120-277V or 347-480V
- Die Cast Aluminum Housing
- Tempered Glass Lens
- DLC Listed
- cETLus listed

TRUNNION MOUNT SOLD SEPARATELY - INSTALL IN FIELD

CAT. NO.	PRIOR CAT. NO.	FIG.	MOUNT	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	DIMMING	REPLACE MH	DIMENSIONS			CASE QTY
											H	W	D	
71334B	71334A	1	1/2" ADJ. KNUCKLE	20W	120-277V	BRONZE	5000K	2,640	NO	70W	9-1/2"	8"	2-7/8"	6
71135B	71135A	1	1/2" ADJ. KNUCKLE	20W	120-277V	WHITE	5000K	2,640	NO	70W	9-1/2"	8"	2-7/8"	6
71336B	71336A	1	1/2" ADJ. KNUCKLE	20W	120-277V	BRONZE	3000K	2,500	NO	70W	9-1/2"	8"	2-7/8"	6
71337B	71337A	1	1/2" ADJ. KNUCKLE	20W	120-277V	WHITE	3000K	2,500	NO	70W	9-1/2"	8"	2-7/8"	6
71343B	71343A	1	1/2" ADJ. KNUCKLE	30W	120-277V	BRONZE	5000K	3,750	NO	100W	9-1/2"	8-1/8"	2-7/8"	6
71141B	71141A	1	1/2" ADJ. KNUCKLE	30W	120-277V	WHITE	5000K	3,750	NO	100W	9-1/2"	8-1/8"	2-7/8"	6
71339B	71339A	1	1/2" ADJ. KNUCKLE	30W	120-277V	BRONZE	3000K	3,295	NO	100W	9-1/2"	8-1/8"	2-7/8"	6
71340B	71340A	1	1/2" ADJ. KNUCKLE	30W	120-277V	WHITE	3000K	3,295	NO	100W	9-1/2"	8-1/8"	2-7/8"	6
71346B	71346A	2	1/2" ADJ. KNUCKLE	50W	120-277V	BRONZE	5000K	6,630	NO	150W	11-5/8"	10-3/4"	3-3/4"	1
71143B	71143A	2	1/2" ADJ. KNUCKLE	50W	120-277V	WHITE	5000K	6,630	NO	150W	11-5/8"	10-3/4"	3-3/4"	1
71353B	71353A	2	1/2" ADJ. KNUCKLE	80W	120-277V	BRONZE	5000K	10,488	0-10V	250W	11-5/8"	10-3/4"	3-3/4"	1
71356B	71356A	3	2-3/8" SLIPFITTER	100W	120-277V	BRONZE	5000K	12,900	0-10V	400W	17"	14-3/8"	4-7/8"	1
71148B	71148A	3	2-3/8" SLIPFITTER	150W	120-277V	BRONZE	5000K	19,865	0-10V	500W	17"	14-3/8"	4-7/8"	1
71357B	-	4	2-3/8" SLIPFITTER	300W	120-277V	BRONZE	5000K	37,800	0-10V	1,000W	20-3/8"	18-3/4"	5-1/2"	1
71149B	71149A	3	2-3/8" SLIPFITTER	150W	<b>347-480V</b>	BRONZE	5000K	20,850	0-10V	500W	17"	14-1/4"	4-7/8"	1
71358B	-	4	2-3/8" SLIPFITTER	300W	<b>347-480V</b>	BRONZE	5000K	42,600	0-10V	1,000W	20-3/8"	18-3/4"	5-1/2"	1
<b>ACCESSORIES</b>														
71361B						VISOR - BRONZE - FOR USE WITH 20W-30W FIXTURES							1	
75350B						VISOR - BRONZE - FOR USE WITH 50W-80W FIXTURES							1	
75351B						VISOR - BRONZE - FOR USE WITH 100W- 150W FIXTURES							1	
75352B						VISOR - BRONZE - FOR USE WITH 300W FIXTURES							1	
71359B						TRUNNION MOUNT - BRONZE - FOR USE WITH 20W-80W FIXTURES							1	
75353B						TRUNNION MOUNT - WHITE - FOR USE WITH 20W-80W FIXTURES							1	
71360B						TRUNNION MOUNT - BRONZE - FOR USE WITH 100W-300W FIXTURES							1	



# BULLET FLOOD GEN 2



FIG. 1

- Voltage: 120-277V
- 0-10V Dimming
- Die Cast Aluminum Housing
- Tempered Glass Lens
- DLC Listed
- cULus Listed



FIG. 2

22° FOR FLAGPOLES & SIGNS

Flood Lighting

CAT. NO.	PRIOR CAT. NO.	FIG.	WATTS	VOLTS	COLOR TEMP	COLOR	LUMENS	BEAM ANGLE	CRI	CASE QTY
<b>FLOODS 22 WATT</b>										
71660B		1	22W	120-277V	5000K	BRONZE	2,873	19°	70	6
71675B		1	22W	120-277V	3000K	BRONZE	2,681	49°	70	6
71677B		1	22W	120-277V	3000K	BLACK	2,681	49°	70	6
71678B		1	22W	120-277V	3000K	WHITE	2,681	49°	70	6
74660		1	22W	120-277V	4000K	BRONZE	2,896	49°	70	6
71679B	71679A	1	22W	120-277V	5000K	BRONZE	2,894	49°	70	6
71682B	71682A	1	22W	120-277V	5000K	WHITE	2,894	49°	70	6
74664		1	22W	120-277V	5000K	BRONZE	2,802	78°	70	6
<b>FLOODS 40 WATT</b>										
71663B		1	40W	120-277V	5000K	BRONZE	5,347	19°	71	6
71691B	71391A	1	40W	120-277V	3000K	BRONZE	4,861	45°	70	6
71694B		1	40W	120-277V	3000K	WHITE	4,861	45°	70	6
71693B		1	40W	120-277V	3000K	BLACK	4,861	45°	70	6
74662		1	40W	120-277V	4000K	BRONZE	5,341	45°	70	6
71695B		1	40W	120-277V	5000K	BRONZE	5,432	45°	71	6
71698B		1	40W	120-277V	5000K	WHITE	5,432	45°	71	6
71697B		1	40W	120-277V	5000K	BLACK	5,432	45°	71	6
74666		1	40W	120-277V	5000K	BRONZE	5,190	78°	71	6
<b>FLAGPOLE / SPOT 72 WATT</b>										
71699		2	72W	120-277V	5000K	BRONZE	8,260	22°	70	4

## PVC MOUNTING POST



CAT. NO.	COLOR	POST	COLLAR	LENGTH	BOX QTY
18101	BRONZE	2-3/8"	2-1/2"	22"	12



# SOLAR FLOOD LIGHTS



FIG. 1

- Charging/Run Time: 20 Hours/7-10 Days
- Multiple Operating Modes
- Battery heater for cold weather applications
- Motion Activated



FIG. 2

SMALL BUT POWERFUL!

- Charging/Run Time: 20 Hours/7-10 Days
- Multiple Operating Modes
- Motion Activated



FIG. 3

- Charging/Run Time: 15 Hours/5-7 Days
- Multiple Operating Modes
- Motion Activated



FIG. 4

- Charging/Run Time: 7 Hours/3-5 Days
- Multiple Operating Modes
- Motion Activated



FIG. 5

- Charging/Run Time: 7.5 Hours/3-5 Days
- Multiple Operating Modes
- NDT Motion Activated
- Photocell Included
- 11' Cable Connecting Panel to Light Allows for FLExible Installations
- Includes Remote Control



FIG. 6

- Charging/Run Time: 8 Hours/3-5 Days
- Multiple Operating Modes
- Solar Panel and Lamps Rotate
- Motion Activated

CAT. NO.	FIG.	WATTS	COLOR TEMP	LUMENS	HOUSING COLOR	IP RATING	MOTION SENSOR	BEAM ANGLE	DIMENSIONS			CASE QTY	ORDER IN MULTIPLES
									H	W	D		
72534	1	20W	4000K	2,000	WHITE	IP65	PIR	120°	5-3/4"	4-1/8"	4-3/8"	24	1
72535	2	10W	4000K	1,000	BLACK	IP65	PIR	120°	2-1/8"	3-1/2"	3"	60	1
72536	3	10W	3000K	1,000	BLACK	IP65	PIR	120°	5-1/4"	4-1/8"	8-1/2"	12	2
72538	4	10W	4000K	1,000	BLACK	IP65	PIR	180°	5-1/4"	4-3/4"	5"	27	1
72537	5	60W	4000K	6,000	BLACK	IP65	NO	120°	4"	13"	1-5/8"	6	1
72539	6	10W	4000K	1,000	BLACK	IP65	PIR	180°	5-5/8"	8-5/8"	4-5/8"	24	1
72549	6	10W	4000K	1,000	WHITE	IP65	PIR	180°	5-5/8"	8-5/8"	4-5/8"	24	1

Solar Flood Lighting



# COLOR & WATTAGE SELECTABLE CLASSIC DUSK TO DAWN



- Voltage: 120-277V
- Color Selectable: 3000K, 4000K, 5000K
- Wattage Selectable
- Aluminum Housing with Polycarbonate Clear Lens
- Photocell Included
- DLC Listed
- cULus Listed

CAT. NO.	PRIOR CAT. NO.	MOUNTING	WATTS	VOLTS	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	PHOTOCELL TYPE	WEIGHT (LBS)	CASE QTY
71333C	71316B 71333B	ARM/WALL	36W 48W 60W	120-277V	3000K 4000K 5000K	8,537	100W-200W	TWIST LOCK	2.8	12
71318C	71318B	ARM/WALL	72W 96W 120W	120-277V	3000K 4000K 5000K	13,870	250W-400W	TWIST LOCK	7	4
<b>MOUNTS (SOLD SEPARATELY)</b>										
71305B		1-1/2" DIAMETER MOUNTING ARM FOR 71318C & 71333C								1

**NEW**

# COLOR SELECTABLE GOOSENECKS



- Voltage: 120-277V
- 0-10V Dimmable
- Photocell included with On/Off switch
- Die Cast Aluminum Housing with Tempered Glass Lens
- 4.9" Back Mounting Plate
- DLC Listed
- cULus Listed

CAT. NO.	PRIOR CAT. NO.	COLOR	COLOR TEMP	WATTS	VOLTS	LUMENS	CASE QTY
75119B	75119A 75122A 75125A	BRONZE	3000K 4000K 5000K	35W	120-277V	4,824	1
75121B	75118A 75121A 75124A	BLACK	3000K 4000K 5000K	35W	120-277V	4,824	1
75123B	75120A 75123A 75126A	WHITE	3000K 4000K 5000K	35W	120-277V	4,824	1

D2D / GOOSENECKS



# SECURITY LIGHTING



LAMPS ONLY  
NO MOTION SENSOR

FIG. 1



FIG. 2

MOTION ACTIVATED  
LIGHTS INCLUDE:  
AUTO MOTION SENSOR MODE  
DUSK TO DAWN MODE  
TEST/SETUP MODE



FIG. 3

- Not Motion Activated - No Photocell
- 24 Watt Dual Head Configuration
- Gasketed for Recessed or Surface Mount
- Turns Lights on Automatically When Motion is Detected

- Gasketed for Recessed or Surface Mount
- Can be Wall or Eave Mounted to Standard Junction Box
- Turns Lights on Automatically When Motion is Detected

- 240° Detection Angle out to 60Ft
- Adjustable Motion & Light Sensitivity & Time Delay
- cETLus listed

## JOHN 2/5 SOLAR SECURITY LIGHT

Charging/Run Time: 8 Hours/3-5 Days  
Multiple Operating Modes  
Solar Panel and Lamps Rotate  
Motion Activated



FIG. 4



FIG. 5

CAT. NO.	PRIOR CAT. NO.	FIG.	DESCRIPTION	DLC	MOTION ACTIVATED	HOUSING COLOR	COLOR TEMP	WATTS	VOLTS	LUMENS	CASE QTY
72578A	72578	1	ROUND 2 HEAD	YES	NO	BRONZE	3000K	20W	120-277V	1,900	12
72579A	72579	1	ROUND 2 HEAD	YES	NO	WHITE	3000K	20W	120-277V	1,900	12
72580A	72580	1	ROUND 2 HEAD	YES	NO	BRONZE	5000K	20W	120-277V	1,900	12
72581A	72581	1	ROUND 2 HEAD	YES	NO	WHITE	5000K	20W	120-277V	1,900	12
72562A	72562	2	ROUND 2 HEAD	YES	YES	BRONZE	3000K	20W	120-277V	1,900	8
72563A	72563	2	ROUND 2 HEAD	YES	YES	WHITE	3000K	20W	120-277V	1,900	8
72568A	72568	2	ROUND 2 HEAD	YES	YES	BRONZE	5000K	20W	120-277V	1,900	8
72569A	72569	2	ROUND 2 HEAD	YES	YES	WHITE	5000K	20W	120-277V	1,900	8
72570A	72570	3	ROUND 3 HEAD	YES	YES	BRONZE	5000K	30W	120-277V	2,850	8
72571A	72571	3	ROUND 3 HEAD	YES	YES	WHITE	5000K	30W	120-277V	2,850	8
72539*		4	SQUARE 2 HEAD	NO	YES	BLACK	4000K	10W	SOLAR	1,000	24
72549*		5	SQUARE 2 HEAD	NO	YES	WHITE	4000K	10W	SOLAR	1,000	24

\*NOTE: SOLAR POWER FIXTURES ARE NOT ETL LISTED

## MOTION SENSOR ONLY

CAT. NO.	PRIOR CAT. NO.	DETECTION ANGLE	VOLTS	HOUSING COLOR	CASE QTY
72582A	72582	240°	120/240VAC	BRONZE	40
72583A	72583	240°	120/240VAC	WHITE	40



Motion / Security



# ORNAMENTAL ENTRYWAY LIGHTS



FIG. 1



FIG. 2

- Classic Ornamental Entryway Lighting
- Die Cast Aluminum Base/Frame
- Frosted Polycarbonate Lens
- Housing Color: Black
- Voltage: 120VAC
- Energy Star Listed
- UL Listed

CAT. NO.	FIG.	WATTS	VOLTS	COLOR TEMP	LUMENS	HOUSING COLOR	CASE QTY
72134	1	9W	120V	4000K	630	BLACK	6
72140	2	9W	120V	4000K	650	BLACK	6

# LOW PROFILE ENTRYWAY LIGHT



- Aluminum Base
- Housing Color: White
- Frosted Polycarbonate Lens
- Housing Color: Black
- Voltage: 120VAC
- Energy Star Listed
- ETL Listed

CAT. NO.	COLOR TEMP	WATTS	VOLTS	HOUSING COLOR	LUMENS	REPLACES METAL HALIDE	BEAM ANGLE	CASE QTY
72518	4000K	9W	120V	WHITE	850	75W	120°	6
72519	5000K	9W	120V	WHITE	850	75W	120°	6

# BULKHEAD LIGHTING



FIG. 1



FIG. 2



FIG. 3

- Die Cast Aluminum Housing
- Polycarbonate Lens
- Housing Color: Black
- Voltage: 120VAC
- Energy Star Listed
- UL Listed

CAT. NO.	FIG.	COLOR TEMP	DIAMETER	WATTS	VOLTS	HOUSING COLOR	LUMENS	REPLACES METAL HALIDE	CASE QTY
<b>LARGE 11" BULKHEAD LIGHTS</b>									
72160	1	5000K	11"	17W	120V	BLACK	1,760	100W	5
72164	2	5000K	11"	17W	120V	BLACK	1,760	100W	5
<b>RECTANGULAR BULKHEAD LIGHTS</b>									
72152	3	4000K	11-3/4" X 7-3/8" X 3-5/8"	9W	120V	BLACK	850	60W	6



# UP/DOWN WALL WASH LIGHTING



- Use for exterior accent lighting
- Die Cast Aluminum Housing
- Standard Knockouts in housing
- Convex Acrylic Lens
- Housing Color: Black
- Voltage: 120-277V
- Energy Star Listed
- ETL Listed



FIG. 1



FIG. 2

CAT. NO.	FIG.	WATTS	VOLTS	TYPE	DLC/ES	UL/ETL	BEAM ANGLE	HOUSING COLOR	LUMENS	REPLACES METAL HALIDE	CASE QTY
72500A	1	12W	120-277V	DOWNLIGHT	ES	ETL	120°	BRONZE	1,100	50W	4
72504A	2	24W	120-277V	UP/DOWN	ES	GETLUS	120°	BLACK	2,200	70W	4



# JELLY JAR ENTRYWAY LIGHT

- Polycarbonate Base
- Frosted PMMA Lens
- Housing Color: Black
- Voltage: 120V
- Energy Star Listed
- UL Listed



CAT. NO.	PHOTOCELL	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	CASE QTY
72100	NO	9W	120V	BLACK	4000K	650	70W	6
72104	NO	12W	120V	BLACK	5000K	1,150	100W	6



# CLASSIC ROUND ENTRYWAY LIGHT

- Painted Steel Base
- Frosted PMMA Lens
- Housing Color: Black
- Voltage: 120V
- Energy Star Listed
- UL Listed



CAT. NO.	PHOTOCELL	WATTS	VOLTS	HOUSING COLOR	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	CASE QTY
72110	NO	12W	120V	BLACK	4000K	850	70W	6
72114	NO	17W	120V	BLACK	4000K	1,350	100W	6



# LED PHOTOCELLS



FIG. 1



FIG. 2



FIG. 3

FIG. 4



CAT. NO.	FIG.	MOUNTING	VOLTS	ON/OFF LUX	TUNGSTEN RATING (W)	BALLAST RATING (VA)	AMPS	CASE QTY
<b>LED BUTTON STYLE</b>								
39100	1	FIXTURE	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	160
39101	2	WALL PLATE	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	100
<b>LED SHUTTER STYLE</b>								
39102	3	FIXED	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	200
39103	3	SWIVEL	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	100
<b>LED PENCIL STYLE</b>								
39104	4	SWIVEL	120-277V	16 LX/24 LX	1000W	1,200 @ 120V 1,800 @ 208-277V	8A @ 120V - 5A @ 208-277V	200

# LED TWIST-LOCK STYLE PHOTOCELLS

**25,000V!**



FIG. 1



FIG. 2

**25KV!**

CAT. NO.	FIG.	MOUNTING	VOLTS	ON/OFF LUX	TUNGSTEN RATING (W)	BALLAST RATING (VA)	AMPS	CASE QTY
39106	1	TWIST LOCK	120-277V	16 LX/24 LX	1000W	1,800 @ 120V 1,800 @ 208-277V	8A @ 120V 5A @ 208-277V	100
39107	1	TWIST LOCK	480V	16 LX/24 LX	1800W	1,800VA	5A	100
<b>HIGH SURGE PROTECTION PHOTOCELLS - 25,000V</b>								
39112*	2	TWIST LOCK	120-277V	10 LX/ 15 LX	1800W	1,800VA	15A @ 120V 6A @ 277V	30

\*NOT UL LISTED

# MECHANICAL PHOTOCONTROLS - LOCKING STYLE



## SPEC GRADE



FIG. 1



FIG. 2

CAT. NO.	FIG.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	COLOR	CASE QTY
39053	1	120V	1800W	1000VA	GRAY	100
39051	2	208-277V	1800W	1000VA	MAROON	100

## STANDARD



FIG. 3



FIG. 4

CAT. NO.	FIG.	VOLTS	SURGE PROTECTION	TUNGSTEN RATING (W)	BALLAST RATING (VA)	COLOR	CASE QTY
39050	3	120V	-	1800W	1000VA	CLEAR	100
39052	4	105 - 285V	235 JOULES/5,000A 820V CLAMPING	1000W	1800VA	BLUE	100

# TWIST LOCK RECEPTACLES



FIG. 1



FIG. 2

CAT. NO.	FIG.	DESCRIPTION	CASE QTY
39070	1	RECEPTACLE FIXTURE MOUNT - UL RECOGNIZED	100
39072	2	RECEPTACLE WITH ALUMINUM BRACKET MOUNT - UL LISTED	100



# MECHANICAL PHOTOCONTROLS - SHUTTER STYLE



## FIXED BASE

CAT. NO.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	CASE QTY
39010	120V	2000W	2,000VA	100
39012	208-277V	2000W	2,000VA	100



## SWIVEL BASE

CAT. NO.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	CASE QTY
39020	120V	2000W	2,000VA	100
39022	208-277V	2000W	2,000VA	100



## SPEC GRADE - FIXED BASE

CAT. NO.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	LIGHT SENSOR	CASE QTY
39011	120V	3000W	3,000VA	1"	50
39013	208-277V	3000W	3,000VA	1"	50



## PHOTOCONTROLS

### PENCIL TYPE



FIG. 1  
SWIVEL BASE



CAT. NO.	FIG.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	CASE QTY
39060	1	120V	1800W	1,100VA	100
39062	1	208-277V	1800W	1,100VA	100

### FLUSH MOUNT

CAT. NO.	FIG.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	CASE QTY
39030	2	120V	1800W	1,100VA	150
39032	2	208-277V	2000W	2,000VA	150
<b>MINI-FLUSH MOUNT</b>					
39069	3	120V	600W	480VA	150



FIG. 2



FIG. 3



## FLUSH MOUNT WITH WALLPLATE

CAT. NO.	VOLTS	TUNGSTEN RATING (W)	BALLAST RATING (VA)	CASE QTY
39040	120V	1800W	1,100VA	100
39042	208-277V	2000W	2,000VA	100



## PHOTOCONTROL MOUNT - SWIVEL EXTENDER

CAT. NO.	DESCRIPTION	CASE QTY
39063	PHOTOCONTROL MOUNT SWIVEL EXTENDER	1



## PHOTOCONTROLS - ACCESSORIES



### SHORTING CAP

CAT. NO.	VOLTS	SURGE PROTECTION	TUNGSTEN RATING (W)	BALLAST RATING (VA)	COLOR	CASE QTY
39056	120V-480V	-	7200W	7,200VA	BLACK	100
39058	480V	460 JOULES/10,000A 820V CLAMPING	7200W	7,200VA	BLACK	100



### OPEN CIRCUIT CAP

CAT. NO.	VOLTAGE	COLOR	CASE QTY
39057	480V	RED	100



# SPECIFICATION GRADE UFO



FIG. 1



FIG. 2

- 6KV surge protection
- IP65 Wet Location Rated
- Emergency Battery Backup Available
- DLC Listed
- cULus Listed

UFO High Bays

CAT. NO.	PRIOR CAT NO.	FIG.	WATTS	COLOR TEMP	VOLTS	HOUSING COLOR	LUMENS	DIMMING	REPLACES METAL HALIDE	CASE QTY
74100B	74100A	1	100W	5000K	120-277V	BLACK	14,680	I-10V	250W	1
74101B	74101A	1	100W	4000K	120-277V	BLACK	14,796	0-10V	250W	1
74297C	74297	2	100W 120W 150W	3000K 4000K 5000K	120-277V	BLACK	22,086	0-10V	250-400W	1
74198C	-	2	100W 120W 150W	3000K 4000K 5000K	120-277V	WHITE	22,086	0-10V	250-400W	1
74102B	74102A	1	150W	5000K	120-277V	BLACK	20,893	I-10V	400W	1
74212	-	1	150W	5000K	120-277V	WHITE	20,893	0-10V	400W	1
74095C	74095B	2	150W	4000K	120-277V	BLACK	21,096	0-10V	400W	1
74199	-	1	160W 200W 240W	3000K 4000K 5000K	120-277V	WHITE	33,740	I-10V	750W	1
74104B	74104A	1	200W	5000K	120-277V	BLACK	29,079	0-10V	600W	1
74214	-	1	200W	5000K	120-277V	WHITE	29,079	0-10V	600W	1
74094C	74094B	2	200W	4000K	120-277V	BLACK	27,981	0-10V	600W	1
74106B	74106A	1	240W	5000K	120-277V	BLACK	33,747	I-10V	750W	1
74093B	74093A	1	240W	4000K	120-277V	BLACK	34,016	I-10V	750W	1
74108A	74108	1	300W	5000K	120-277V	BLACK	45,215	I-10V	1000W	1
74103B	74103A	1	160W 200W 240W	5000K	200-480V	BLACK	33,139	I-10V	750W	1

### ACCESSORIES

76503	40W EMERGENCY BACKUP FOR 120-277V FIXTURES	4
76504	REMOTE TESTER FOR EMERGENCY BATTERY BACKUP	50
74143	1/2" - 3/4" NPT CONDUIT ADAPTOR	100
74187B	MICROWAVE MOTION SENSOR - 120-277V FIXTURES	150
74186B	PIR SENSOR - 120-277V FIXTURES	150
74188B	REMOTE CONTROL - PIR AND MICROWAVE MOTION SENSORS	100
74072C	MICROWAVE MOTION SENSOR - 480V FIXTURES	100
74110B	BLACK U-BRACKET - 100W-150W FIXTURES	20
74112B	BLACK U-BRACKET - 200W-240W FIXTURES	20
74135C	WIRE GUARD - 100W-150W FIXTURES	20
74137C	WIRE GUARD - 200W-240W FIXTURES	20
74119B	90° ALUMINUM REFLECTOR - 100W-150W FIXTURES	20
74121B	90° ALUMINUM REFLECTOR - 200W-240W FIXTURES	20
74123B	90° PC REFLECTOR - 100W-150W FIXTURES	10
74149B	90° PC BOTTOM COVER - 100W-150W FIXTURE	10
74125B	90° PC REFLECTOR - 200W-240W FIXTURES	30
74152B	90° PC BOTTOM COVER - 200W-240W FIXTURES	30



**NEW**

# ECONOMY UFO



FIG. 1

- 0-10V Dimmable
- No Motion Sensor
- Die Cast Aluminum Housing
- Housing Color: Black
- Polycarbonate Lens
- IP65 Rated
- DLC Listed
- cULus listed

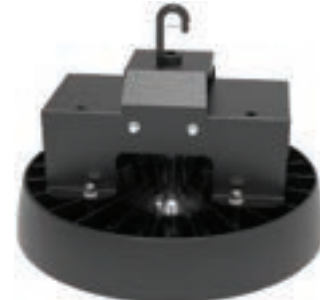


FIG. 2  
347-480V ONLY

CAT. NO.	PRIOR CAT. NO.	FIG.	WATTS	COLOR TEMP	VOLTS	LUMENS	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
74096B	74096A	1	100W	5000K	120-277V	14,050	250W	9.5	1
74097B	74097A	1	150W	5000K	120-277V	20,660	400W	10	1
74098B	74098A	1	200W	5000K	120-277V	27,830	600W	13	1
74099B	74099A	1	240W	5000K	120-277V	33,380	750W	14	1
74109B	74109A	2	300W	5000K	347-480V	41,500	1000W	15	1
<b>ACCESSORIES</b>									
76503					40W EMERGENCY BACKUP FOR 120-277V FIXTURES				4
76504					REMOTE TESTER FOR EMERGENCY BATTERY BACKUP				50
74143					1/2" - 3/4" NPT CONDUIT ADAPTOR				1



## UFO LINE SIDE EMERGENCY BATTERY BACKUP

120V AC (170V DC Line Side Wiring)

No load side DC wiring necessary - **FAST & SIMPLE**

Remote Tester for periodic battery testing - works with multiple units



CAT. NO.	WATTS	CASE QTY
76503	40W	4
76504	REMOTE TESTER	50



**NEW**

# LINEAR HIGH BAY AIMABLE LENS



- 0-10V Dimmable
- Emergency Backup & Motion Sensor Capable (Sold Separately)
- 180 degree Rotating Lens
- Triangular Suspension Mount Hooks with 3' Hang Chain Included
- Replaces T12, T8 & T5 High Bay Lighting
- DLC Listed
- cULus listed

Linear High Bays

CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	COLOR TEMP	LUMENS	REPLACES FLUORESCENT	CASE QTY
71703B	71703A	50W	120-277V	5000K	7,107	128W	1
71705B	71705A	50W	120-277V	4000K	7,029	128W	1
71706B	71706A	110W	120-277V	5000K	15,473	216W	1
71708B	71708A	110W	120-277V	4000K	14,976	216W	1
71709B	71709A	165W	120-277V	5000K	22,813	324W	1
71711B	71711A	165W	120-277V	4000K	22,742	324W	1
71713B	71713A	220W	120-277V	5000K	30,114	500W	1
71715B	71715A	220W	120-277V	4000K	30,114	500W	1
71718B	71718A	300W	120-277V	5000K	40,729	-	1
71710B	71710A	165W	<b>347-480V</b>	5000K	22,813	324W	1
71714B	-	220W	<b>314-480V</b>	5000K	30,114	500W	1
<b>ACCESSORIES</b>							
76502			25W EMERGENCY BATTERY BACKUP				10
74187B			MICROWAVE MOTION SENSOR - <b>120-277V FIXTURES</b>				150
74186B			PIR SENSOR - <b>120-277V FIXTURES</b>				150
74188B			REMOTE CONTROL - PIR AND MICROWAVE MOTION SENSORS				100
74072C			MICROWAVE MOTION SENSOR FOR 480V				100
71717A			SUSPENSION CABLE				200
71738A			PENDANT MOUNT FOR 480V				20
71739A			PENDANT MOUNT FOR 120-277V				20
71740A			SURFACE MOUNT KIT FOR 480V				40
71741A			SURFACE MOUNT FOR 120-277V				40

## LINE SIDE EMERGENCY BATTERY BACKUP



- For use with Linear High Bays, Panels, Troffers, Strips, Wraps & Vaportight Fixtures
- 120V AC (170V DC Line Side Wiring)
- No load side DC wiring necessary - **FAST & SIMPLE**
- UL Listed

CAT. NO.	WATTS	CASE QTY
76501	15	10
76502	25	10



**NEW**

## COLOR & WATTAGE SELECTABLE PANEL LIGHTS




- 0-10V Dimming
- Color & Wattage Selectable
- Backlit Panel
- Mounting Accessories & Emergency Battery Backup Available
- DLC Listed
- cETLus Listed

CAT. NO.	SIZE	COLOR TEMP	FIXTURE HEIGHT	WATTS	VOLTS	LUMENS @MAX WATTS	LM/W	DIMMING	REPLACES FLUORESCENT	ORDER IN MULTIPLES
<b>3500K - 5000K CCT &amp; WATTAGE SELECTABLE DLC PREMIUM</b>										
71164D	2X2	3500K 4000K 5000K	1-5/8"	20W 30W 35W	120-277V	4,313	125	0-10V	64-128W	4
71165D	2X4	3500K 4000K 5000K	1-5/8"	25W 35W 40W	120-277V	5,228	131	0-10V	64-128W	4
<b>ACCESSORIES</b>										
76501				15W EMERGENCY BATTERY BACKUP FOR 71164D - EXTERNAL MOUNT ONLY						10
76502				25W EMERGENCY BATTERY BACKUP FOR 71165D - EXTERNAL MOUNT ONLY						10
71797B				SURFACE MOUNT KIT FOR 2X2 PANELS						10
71799D				SURFACE MOUNT KIT FOR 2X4 PANELS						10



## COLOR & WATTAGE SELECTABLE PANEL LIGHTS SURFACE MOUNT

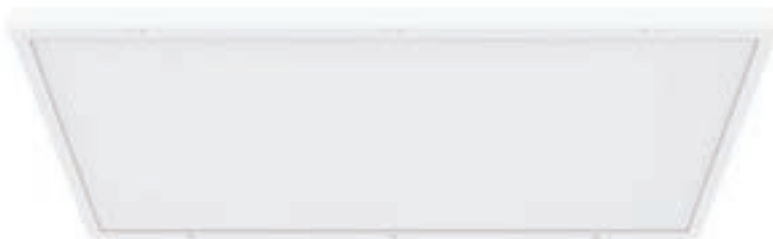

- Integral Surface Mount Frame & Fixture for Fast, Cost Effective Mounting to Sheetrock
- Low Profile
- Dimming: 0-10V
- Aluminum Frame
- IP40 Rated
- DLC Premium Listed
- cETLus Listed

CAT. NO.	SIZE	COLOR TEMP	FIXTURE HEIGHT	WATTS	VOLTS	LUMENS @MAX WATTS	LM/W	REPLACES FLUORESCENT	ORDER IN MULTIPLES	
72802	2X2	3500K 4100K 5000K	1-3/4"	20W 25W 30W 36W 40W	120-277V	4,901	126	64-128W	4	
72804	2X4	3500K 4100K 5000K	1-3/4"	25W 30W 40W 45W 50W	120-277V	6,373	126	64-128W	4	
<b>ACCESSORIES</b>										
76501				15W EMERGENCY BATTERY BACKUP FOR 72802 - EXTERNAL MOUNT ONLY						10
76502				25W EMERGENCY BATTERY BACKUP FOR 72804 - EXTERNAL MOUNT ONLY						10

Panel Lights



**NEW**

# COLOR & WATTAGE SELECTABLE TROFFERS



- Color & Wattage Selectable
- Surface Mount
- 0-10V Dimming
- ETL Listed
- 50,000+ hour life expectancy
- DLC Listed
- cETLus Listed



Troffers

CAT. NO.	SIZE	COLOR TEMP	WATTS RANGE	VOLTS	LUMENS @ MAX WATTS	LM/W	DIMMING	REPLACES FLUORESCENT	ORDER IN MULTIPLES
71789C	2X2	3500K 4000K 5000K	20W 25W 30W	120-277V	3,811	132	0-10V	64-128W	2
71784C	2X4	3500K 4000K 5000K	34W 38W 45W	120-277V	6,268	138	0-10V	64-128W	2
<b>ACCESSORIES</b>									
76501			15W EMERGENCY BATTERY BACKUP FOR 71789C - EXTERNAL MOUNT ONLY						10
76502			25W EMERGENCY BATTERY BACKUP FOR 71784C - EXTERNAL MOUNT ONLY						10

# COLOR SELECTABLE LED CLASSIC STRIPLIGHT



CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES FLUORESCENT	CASE QTY	
71914A*	2'	3500K 4000K 5000K	20W	120-277V	3,125	82	64-128W	10	
71913B	4'	3500K 4000K 5000K	22W 28W 40W	120-277V	5,317	82	64-128W	6	
<b>ACCESSORIES</b>									
71729B			MICROWAVE MOTION SENSOR						1
71769A			MICROWAVE MOTION SENSOR REMOTE CONTROL						1
76501			15W EMERGENCY BATTERY BACKUP FOR 71914A - EXTERNAL MOUNT ONLY						10
76502			25W EMERGENCY BATTERY BACKUP FOR 71913B - INTERNAL OR EXTERNAL MOUNT						10

- Color & Wattage Selectable
- Surface Mount
- 0-10V Dimming
- 50,000+ hour life expectancy
- DLC Listed
- cULus Listed



\* NOT DLC LISTED



- 0-10V Dimmable
- Compatible with most LED dimmers
- Polycarbonate Housing & Stainless Steel Hasp
- IP65 Rated
- DLC Listed
- cULus Listed

## COLOR SELECTABLE LED LINEAR VAPORTIGHT



CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS @4K	CRI	REPLACES FLUORESCENT	CASE QTY
71900B	2'	3500K, 4000K 5000K	25W	120-277V	3,375	80	64-128W	6
71901B	4'	3500K, 4000K 5000K	40W	120-277V	5,400	80	64-128W	6

### ACCESSORIES

76501	15W EMERGENCY BATTERY BACKUP FOR 71900B - EXTERNAL MOUNT ONLY							10
76502	25W EMERGENCY BATTERY BACKUP FOR 71901B - INTERNAL OR EXTERNAL MOUNT							10
71721A	INTERNAL MICROWAVE MOTION SENSOR - 4' ONLY							1
71719A	INTERNAL MOTION SENSOR CONTROLLER - 4' ONLY							1
71729B	EXTERNAL MICROWAVE MOTION SENSOR - 4' ONLY							1
71769A	EXTERNAL MICROWAVE MOTION SENSOR CONTROLLER - 4' ONLY							1



## LED VAPORTIGHT JELLY JARS

- Die Cast Aluminum Housing
- Wall or Ceiling Mount
- Threaded Apertures: (4)Sides (1)Top/Back
- IP65 Rated
- cULus Listed

FIG. 1



FIG. 2



CAT. NO.	PRIOR CAT. NO.	FIG.	WATTS	VOLTS	LUMENS	REPLACE METAL HALIDE	MOUNT	WEIGHT (LBS)	CASE QTY
72105A	72105	1	11W	120-277V	1,112	50W	CEILING	1.8	6
72107A	72107	1	23W	120-277V	2,632	100W	CEILING	1.9	6
72106A	72106	2	11W	120-277V	1,112	50W	WALL	2.5	6
72108A	72108	2	23W	120-277V	2,632	100W	WALL	2.6	6



## LED LINEAR SHOPLIGHT

71930A



- Steel Housing - Corrosion Resistant Finish
- Polycarbonate Frosted Lens
- Linkable:
  - 40W - up to 8 fixtures
  - 23W - up to 12 fixtures
- 71946A On/Off Pull Chain
- 71930A On/Off Switch
- Energy Star Listed
- cETLus Listed



CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES FLUORESCENT	LINKABLE	CASE QTY
71930A	4'	5000K	23W	120V	2,412	83	64W	YES	12
71946A	4'	5000K	40W	120V	4,006	83	64-128W	YES	8



# LED CLASSIC LINEAR WRAP



- 0-10V Dimmable
- Heavy Gauge Steel Housing
- PMMA Frosted Diffuser
- IP23 Rated for Damp Location
- DLC Listed
- cULus Listed

CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES FLUORESCENT	CASE QTY
71942A*	2'	5000K	25W	120-277V	3,000	83	64W	1
71943A*	2'	4000K	25W	120-277V	3,000	83	64W	1
71940A	4'	5000K	40W	120-277V	4,800	83	64-128W	1
71941A	4'	4000K	40W	120-277V	4,800	83	64-128W	1
<b>ACCESSORIES</b>								
71729B	MICROWAVE MOTION SENSOR							1
71769A	REMOTE CONTROL FOR MICROWAVE MOTION SENSOR							1
76501	15W EMERGENCY BATTERY BACKUP FOR 71942A & 71943A - EXTERNAL MOUNT ONLY							10
76502	25W EMERGENCY BATTERY BACKUP FOR 71940A & 71941A - EXTERNAL MOUNT ONLY							10

\*NOT DLC LISTED

# ECONOMY WRAP



- 0-10V Dimmable
- Heavy Gauge Steel Housing
- PMMA Frosted Diffuser
- IP20 Rated
- DLC Listed
- cULus Listed

CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES FLUORESCENT	CASE QTY
71974	4'	5000K	40W	120-277V	4,852	83	64-128W	4
71975	4'	4000K	40W	120-277V	4,875	81	64-128W	4
<b>ACCESSORIES</b>								
76502	25W EMERGENCY BATTERY BACKUP - EXTERNAL MOUNT ONLY							10

# COLOR SELECTABLE LED CLASSIC LINEAR WRAP



- 0-10V Dimmable
- Heavy Gauge Steel Housing
- PMMA Frosted Diffuser
- IP40 Rated
- cULus Listed

CAT. NO.	LENGTH	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES FLUORESCENT	CASE QTY
71944A	4'	3500K 4000K 5000K	40W	120-277V	4,800	83	64-128W	1
<b>ACCESSORIES</b>								
71729B	MICROWAVE MOTION SENSOR							1
71769A	REMOTE CONTROL FOR MICROWAVE MOTION SENSOR							1
76502	25W EMERGENCY BATTERY BACKUP - EXTERNAL MOUNT ONLY							10

Linear Wraps



# LED DESIGNER LINEAR ARC WRAP



- 0-10V Dimmable
- Heavy Gauge Steel Housing
- Polycarbonate Frosted Diffuser
- IP20 Rated
- cULus Listed

CAT. NO.	DESCRIPTION	LUMENS	LENGTH	WATTS	COLOR TEMP	VOLTS	REPLACES FLUORESCENT	DIMENSIONS			CASE QTY
								L	W	H	
71932A	4' WRAP	4,800	4'	40W	4000K	120-277V	64-128W	48"	4-3/4"	2-7/8"	6
71931A	4' WRAP	4,800	4'	40W	5000K	120-277V	64-128W	48"	4-3/4"	2-7/8"	6
<b>ACCESSORIES</b>											
76502	25W EMERGENCY BATTERY BACKUP - EXTERNAL MOUNT ONLY										10
71933	4' REFLECTORS - SET OF 2										6

## COLOR & WATTAGE SELECTABLE

# ARCHITECTURAL LINEAR ARC WRAP



- 0-10V Dimmable
- Aluminum Housing
- Polycarbonate Frosted Lens
- IP20 Rated
- cULus Listed

CAT. NO.	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS @ MAX WATTS	BEAM ANGLE	LM/W	CRI	REPLACES FLUORESCENT	CASE QTY
71945A	4'	3500K 4000K 5000K	32W 40W 45W	120-277V	6,012 @ 4K	120°	120	82	50W	1
<b>ACCESSORIES</b>										
71948A	SUSPENSION KIT - 1 SET									1
71729B	EXTERNAL MICROWAVE MOTION SENSOR									1
71769A	EXTERNAL MICROWAVE MOTION SENSOR CONTROLLER									1
71915A	LOW EMERGENCY BATTERY BACKUP - INTERNAL MOUNT									1
71720A	6' WIRING WHIP									1



# DESIGNER LINEAR WRAP



- Louvered Lens
- Heavy Gauge Steel Housing
- White Powder Coat Finish
- IP20 Rated for Dry Locations
- cULus Listed

CAT. NO.	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	BEAM ANGLE	LM/W	CRI	REPLACES FLUORESCENT	ORDER IN MULTIPLES
----------	------	------------	-------	-------	--------	------------	------	-----	----------------------	--------------------

### SUSPENSION KIT INCLUDED


71954A	4'	4000K	40W	120-277V	5,070	H104; V134	112	80	64-128W	2
--------	----	-------	-----	----------	-------	------------	-----	----	---------	---

### ACCESSORIES

71957A						CONNECTION KIT				1 SET
71952A						SUSPENSION KIT (INCLUDED WITH FIXTURE)				1 SET
71720A						6' WIRING WHIP				1

Designer Wraps

# DESIGNER UP/DOWN LINEAR WRAP *ADJUSTABLE UP/DOWN OPTICS*

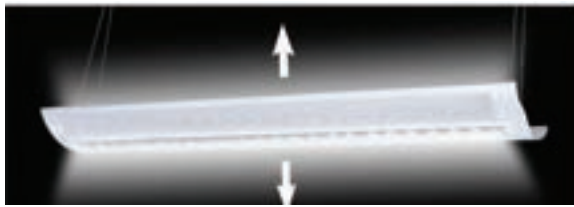

- Louvered Lens
- Heavy Gauge Steel Housing
- White Powder Coat Finish
- 67% Up/33% Down Lighting Distribution
- IP20 Rated for Dry Locations
- cULus Listed

CAT. NO.	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	BEAM ANGLE	LM/W	CRI	REPLACES FLUORESCENT	CASE QTY
----------	------	------------	-------	-------	--------	------------	------	-----	----------------------	----------


### SUSPENSION KIT INCLUDED

71961A	4'	4000K	60W	120-277V	6,195	H102; V44	90	80	128-216W	1
--------	----	-------	-----	----------	-------	-----------	----	----	----------	---

### ACCESSORIES

71952A						SUSPENSION KIT (INCLUDED WITH FIXTURE)				1 SET
71963A						CONNECTION PLATE (SET OF 2)				100
71915A						10W EMERGENCY BACKUP				10
71720A						6' WIRING WHIP				1

# LED UP/DOWN FLAT PANEL

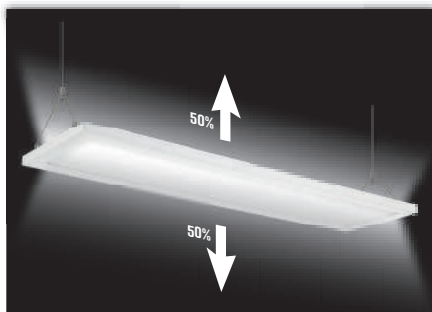

- Flat Panel Design
- Heavy Gauge Steel Housing
- White Powder Coat Finish
- PMMA Frosted Diffuser
- 50% Up/50% Down Lighting Distribution
- IP20 Rated for Dry Locations
- cULus Listed

CAT. NO.	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	BEAM ANGLE	LM/W	CRI	REPLACES FLUORESCENT	ORDER IN MULTIPLES
----------	------	------------	-------	-------	--------	------------	------	-----	----------------------	--------------------

### SUSPENSION KIT INCLUDED

71950A	4'	4000K	40W	120-277V	4,104	H158; V158	109	80	64-128W	2
--------	----	-------	-----	----------	-------	------------	-----	----	---------	---

### ACCESSORIES

71952A						SUSPENSION KIT (INCLUDED WITH FIXTURE)				1 SET
71720A						6' WIRING WHIP				1



# LOOP CABLE GRIPS

SECONDARY RETENTION

CAT. NO.	FIG.	DESCRIPTION	BAG QTY
17200	1	SMALL LOOP CABLE GRIP 1/16" - 5/64" 110LB TENSILE	10
17201	2	MEDIUM LOOP CABLE GRIP 3/32" - 1/8" 250LB TENSILE	10
17202	3	LARGE LOOP CABLE GRIP 3/16" 660LB TENSILE	5



FIG. 1

FIG. 2

FIG. 3

## MINI/SMALL LOOP CABLE GRIPS

CAT. NO.	FIG.	DESCRIPTION	BAG QTY
17203	1	MINI LOOP CABLE GRIP WITH LOOPEO WIRE ROPE - 3/64" - 1/16" X 10' 66LB TENSILE	1 KIT
17204	2	MINI LOOP CABLE GRIP WITH STUD END WIRE ROPE - 3/64" - 1/16" X 10' 66LB TENSILE	1 KIT
17205	3	MINI LOOP CABLE GRIP WITH Y LOOPEO WIRE ROPE - 3/64" - 1/16" X 1' 66LB TENSILE	1 KIT
17206	4	SMALL LOOP CABLE GRIP WITH LOOPEO WIRE ROPE - 5/64" - 1/16" X 10' 110LB TENSILE	1 KIT



FIG. 1

FIG. 2

FIG. 3

FIG. 4

## MINI/SMALL LOOP CABLE GRIPS

CAT. NO.	FIG.	DESCRIPTION	BAG QTY
17208	1	WIRE ROPE WITH HALF BALL END STOP 1/16" X 60" 66LB TENSILE	10
17209	2	WIRE ROPE WITH "TEE" CRIMP END STOP 5/64" X 60" 110LB TENSILE	10
17210	3	WIRE ROPE WITH "TEE" CRIMP END STOP 1/8" X 60" 250LB TENSILE	10



FIG. 1

FIG. 2

FIG. 3

## WIRE ROPE HANGERS

CAT. NO.	FIG.	DESCRIPTION	TENSILE STRENGTH/LBS	CASE QTY
17211	1	WIRE ROPE LOOPEO END 1/16" X 60"	66	100
17212	1	WIRE ROPE LOOPEO END 5/64" X 60"	110	100
17213	1	WIRE ROPE LOOPEO END 1/8" X 60"	250	100
17214	1	WIRE ROPE LOOPEO END 3/16" X 60"	660	100
17215	2	WIRE ROPE WITH TOGGLE 1/16" X 60"	66	100
17216	2	WIRE ROPE WITH TOGGLE 5/64" X 60"	110	100
17217	2	WIRE ROPE WITH TOGGLE 1/8" X 60"	250	100
17218	3	WIRE ROPE WITH Y TOGGLE 1/16" X 60"	66	400
17219	3	WIRE ROPE WITH Y TOGGLE 5/64" X 60"	110	400
17220	3	WIRE ROPE WITH Y TOGGLE 1/8" X 60"	250	400
17221	4	WIRE ROPE WITH V TOGGLE 1/16" X 60"	66	400
17222	4	WIRE ROPE WITH V TOGGLE 5/64" X 60"	110	400
17223	4	WIRE ROPE WITH V TOGGLE 1/8" X 60"	250	400
17224	5	WIRE ROPE WITH V HOOK & BLOCCKER 1/16" X 60"	66	600
17225	6	WIRE ROPE WITH STUD 1/16" X 12" "V" LENGTH = 1FT	66	400
17226	6	WIRE ROPE WITH STUD 1/8" X 12" "V" LENGTH = 1FT	250	400
17227	7	WIRE ROPE WITH STUD 1/16" X 12"	66	400
17228	7	WIRE ROPE WITH STUD 60" X 1/8"	250	400
17229	8	WIRE ROPE ROLL 1/16"	66	50
17230	8	WIRE ROPE ROLL 1/8" X 500'	250	50



FIG. 8



**NEW**

# COLOR SELECTABLE WAFFER DOWNLIGHTS



SMOOTH



BAFFLE



72786B FRAME KIT FOR  
3", 4", & 6" WAFERS

- 5 CCT Color Selectable
- 120° beam angle
- Triac Dimming
- Remote Driver
- IC Rated for direct contact with insulation
- Energy Star Listed
- cETLus Listed



CAT. NO.	PRIOR CAT. NO.	TRIM STYLE	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72781B	-	SMOOTH	3"	2700K, 3000K, 3500K, 4000K, 5000K	6W	120V	380	80	50W	36
72680B	72680A	SMOOTH	4"	2700K, 3000K, 3500K, 4000K, 5000K	9W	120V	675	80	50W	24
72682B	72682A	SMOOTH	6"	2700K, 3000K, 3500K, 4000K, 5000K	12W	120V	1,000	80	75W	24
72783B	-	SMOOTH	8"	2700K, 3000K, 3500K, 4000K, 5000K	18W	120V	1,440	80	100W	24
72784B	-	BAFFLE	4"	2700K, 3000K, 3500K, 4000K, 5000K	9W	120V	675	80	50W	24
72785B	-	BAFFLE	6"	2700K, 3000K, 3500K, 4000K, 5000K	12W	120V	1,000	80	75W	24
<b>ACCESSORIES</b>										
72786B	FRAME KIT FOR 3", 4" & 6"									24

# COLOR SELECTABLE ROUND PANELS



FIXTURE SHOWN WITH  
OPTIONAL EMERGENCY  
BATTERY BACKUP



- Ultra-Thin 5/8" Depth
- Available in 6" (10W), 8" (15W) & 12" (18W)
- Triac Dimming
- Emergency Battery Backup Available
- Energy Star Listed
- ETL Listed



CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72290	6"	10W	120V	3000K, 4000K, 5000K	650	>90	75W	10
72291	8"	15W	120V	3000K, 4000K, 5000K	1,050	>90	100W	8
72292	12"	18W	120V	3000K, 4000K, 5000K	1,250	>90	150W	6
<b>EMERGENCY BACKUP ( 8" ONLY )</b>								
72722	DUMMY EMERGENCY DRIVER HOUSING - NO EMERGENCY BACKUP							1
72723	8W EMERGENCY BATTERY BACKUP & HOUSING							1

# ROUND PANEL REPLACEMENT RINGS FOR 6" & 8" PANELS

REPLACEMENT RINGS ARE NOT COMPATIBLE WITH  
THE EMERGENCY BATTERY BACKUP OR  
DUMMY EMERGENCY DRIVER HOUSING



BLACK



NICKEL



OIL RUBBED  
BRONZE

CAT. NO.	DESCRIPTION	CASE QTY
72293	6" BLACK REPLACEMENT RING	12
72294	6" BRUSHED NICKEL REPLACEMENT RING	12
72295	6" OIL RUBBED BRONZE REPLACEMENT RING	12
72296	8" BLACK REPLACEMENT RING	12
72297	8" BRUSHED NICKEL REPLACEMENT RING	12
72298	8" OIL RUBBED BRONZE REPLACEMENT RING	12



# COLOR & WATTAGE SELECTABLE NEW CONSTRUCTION DOWNLIGHTS

- 72769 & 72639B 5CCT Color Selectable
- 72638 3CCT Color Selectable
- Wattage Selectable
- Energy Star Listed
- 72769 is UL Listed
- 72638 & 72639B are cETLus Listed



FIG. 1



FIG. 2

**NEW**

CAT. NO.	PRIOR CAT. NO.	FIG.	TRIM STYLE	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS @ MAX WATTS	CRI	DIMMING	REPLACES INCANDESCENT	CASE QTY
72769	-	1	SMOOTH	4"	2700K, 3000K, 3500K, 4000K, 5000K	7W, 10W, 13W	120-277V	1,050	93	0-10V	40-75W	12
72638	-	1	SMOOTH	6"	3000K, 4000K, 5000K	10W, 15W, 22W	120-277V	2,150	93	-	75-150W	6
72639B	72639	2	BAFFLE	8"	2700K, 3000K, 3500K, 4000K, 5000K	17W, 24W, 30W	120V-277V	3,273	≥90	0-10V	100W-150W	12



## DOWNLIGHT WITH JUNCTION BOX

- Includes 4" Square Junction Box
- Triac Dimming @ 120V Only - Down to 10%
- Torsion Spring Brackets for Mounting to Sheetrock
- Energy Star Listed
- cETLus Listed



CAT. NO.	SIZE	TRIM STYLE	COLOR TEMP	WATTS	LUMENS	VOLTS	CRI	BEAM ANGLE	REPLACES INCANDESCENT	CASE QTY
ROUND										
72653	8"	ALUM BAFFLE	3000K	25W	1,750	120-277V	92	94	150W	6
72654	8"	ALUM BAFFLE	4000K	25W	1,900	120-277V	92	94	150W	6
72655	8"	ALUM BAFFLE	5000K	25W	1,900	120-277V	92	94	150W	6
SQUARE										
72647	4"	SMOOTH	4000K	10W	700	120V	92	93	75W	12

New Construction Downlights



**NEW** COLOR SELECTABLE

# SURFACE MOUNT RETROFIT DOWNLIGHTS



- 5 CCT Color Selectable
- Triac Dimming
- Mounting accessories included
- Wet location rated
- Energy Star Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72615B	72615 72616 72617	4"	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	617	≥90	75W	24
72612B	72612 72613 72614 72721 72765	6"	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	1,126	≥90	100W	24

Surface Mount Downlighting

## 8" SURFACE MOUNT LIGHTING



- Junction Box or Recessed Can Mounting
- Triac Dimming
- IC (Insulation Contact) Rated
- Wet location rated
- Energy Star Listed
- cULus Listed

CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72766	8"	20W	120V	3000K	1,600	>96	150W	12
72767	8"	20W	120V	4000K	1,600	>96	150W	12
72768	8"	20W	120V	5000K	1,600	>96	150W	12

**NEW** COLOR SELECTABLE

# SURFACE MOUNT RETROFIT DOWNLIGHTS



**WITH MOTION SENSOR**



- 5 CCT Color Selectable
- Motion Sensor Included
- Triac Dimming
- Suitable for use in closets when installed in accordance with NEC requirements
- Auto turn-off time selectable
- Energy Star Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72740B	72740 72741 72742	6"	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	1,126	≥90	100W	24



**NEW**



## COLOR SELECTABLE RETROFIT DOWNLIGHTS



- 5 CCT Color Selectable
- Triac Dimming
- Easy Clip-in to existing can housing
- Baffle/Smooth Finish Option
- Emits Evenly - no halo or shadows
- Energy Star Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	TRIM STYLE	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72761B	72607 72608 72761	BAFFLE	4"	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V	752	≥90	75W	60
72762B	72609 72610 72611 72762	BAFFLE	6"	2700K, 3000K, 3500K, 4000K, 5000K	15W	120V	1,158	≥90	100W	24
72763B	72604 72605 72626 72763	SMOOTH	4"	2700K, 3000K, 3500K, 4000K, 5000K	10W	120V	752	≥90	75W	60
72764B	72601 72602 72603 72764	SMOOTH	6"	2700K, 3000K, 3500K, 4000K, 5000K	15W	120V	1,158	≥90	100W	24



## RECESSED LIGHTING RETROFIT

- Triac Dimming
- Compatible with most household dimmers
- Baffled Bezel
- Aluminum Housing/Trim - Paintable
- Energy Star Listed
- cETLus Listed



CAT. NO.	STYLE	COLOR	SIZE	COLOR TEMP	WATTS	VOLTS	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72626	BAFFLE	WHITE	8"	3000K	25W	120V	2,000	>90	100W	6
72627	BAFFLE	WHITE	8"	4000K	25W	120V	2,050	>90	100W	6
72628	BAFFLE	WHITE	8"	5000K	25W	120V	2,100	>90	100W	6
72629	BAFFLE	WHITE	8"	3000K	35W	120V	2,600	>90	120W	6
72630	BAFFLE	WHITE	8"	4000K	35W	120V	2,675	>90	120W	6
72631	BAFFLE	WHITE	8"	5000K	35W	120V	2,750	>90	120W	6



## SQUARE RECESSED LIGHTING RETROFIT KIT

- Triac Dimming
- Compatible with most household dimmers
- Can be installed in most 5" & 6" Downlights
- Energy Star Listed
- cETLus Listed



CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72635	6"	15W	120V	3000K	971	>90	75W	12
72637	6"	15W	120V	5000K	1,040	>93	75W	12



**NEW** *COLOR SELECTABLE*  
**GIMBAL RETROFIT DOWNLIGHT**



- 5 CCT Color selectable
- 60-degree lens tilt for specific spotlighting
- 360-degree horizontal swivel of lens
- Triac Dimming
- Energy Star Listed
- cETLus Listed

CAT. NO.	PRIOR CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72620B	72620 72621	4"	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	720	≥90	75W	24

**GIMBAL RECESSED LIGHTING RETROFIT KIT**



- Triac Dimming
- Compatible with most household dimmers
- Adjustable/Rotatable Gimbal Lens
- Energy Star Listed
- cETLus Listed

CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72623	5" & 6"	15W	120V	3000K	1,040	>91	75W	12
72624	5" & 6"	15W	120V	4000K	1,040	>91	75W	12
72625	5" & 6"	15W	120V	5000K	1,040	>91	75W	12

**COMMERCIAL RECESSED RETROFIT LIGHTING**



FIG. 1



FIG. 2



FIG. 3

- Ideal for Retrofit Applications
- 8" & 10" include 15" Greenfield wire Whip to Driver and Line Side with Box Connectors Included for easy installation
- IP43 Damp Location Rated
- Energy Star Listed
- cETLus Listed

CAT. NO.	FIG.	SIZE	WATTS	VOLTS	COLOR TEMP	BEAM ANGLE	LUMENS	CRI	DIMMING	REPLACES INCANDESCENT	CASE QTY
72657	1	4"	15W	120V	4000K	60°	1,138	>91	TRIAC	100W	12
72659	1	6"	20W	120V	3000K	60°	1,450	>91	TRIAC	150W	12
72660	1	6"	20W	120V	4000K	60°	1,450	>91	TRIAC	150W	12
72661	1	6"	20W	120V	5000K	60°	1,450	>91	TRIAC	150W	12
72664	2	8"	45W	120-277V	4000K	80°	4,000	>80	0-10V	250W	2
72667	3	10"	30W	120-277V	5000K	35°	2,850	>80	0-10V	150W	1
72669	3	10"	40W	120-277V	5000K	35°	3,600	>80	0-10V	250W	1

**COMMERCIAL RECESSED WITH EMERGENCY BACKUP**



- 0-10V Dimming
- Pre-Installed Emergency Battery Backup
- Minimum 90 Minute Run Time in Emergency Mode
- IP43 Damp Location Rated
- cETLus Listed

CAT. NO.	SIZE	WATTS	VOLTS	COLOR TEMP	BEAM ANGLE	LUMENS	CRI	REPLACES INCANDESCENT	CASE QTY
72692	8"	30W	120-277V	4000K	60°	2,898	>91	100W	12

Downlighting



# RETROFIT HI-BAY LAMP



FIG. 1


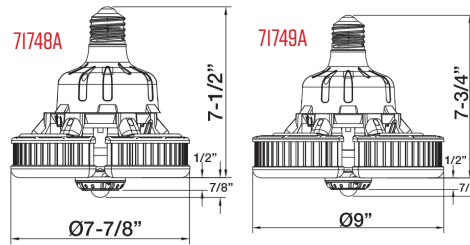


FIG. 2

- E39 Mogul Base
- Retrofit for HPS & MH Hi-Bay Lamps
- Input Voltage: 120-277VAC
- DLC Listed
- UL Listed

CAT. NO.	FIG.	WATTS	VOLTS	LUMENS	COLOR TEMP	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
71748A	1	80W	120-277V	10,609	5000K	250W	3.2	4
71749A	1	120W	120-277V	16,099	5000K	400W	3.7	4
70621	2	155W	120-277V	19,098	5000K	400W	4.4	6
70622	2	240W	120-277V	31,200	5000K	1,000W	3.5	4

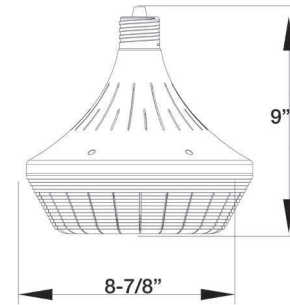

# RETROFIT HIGH BAY LAMP

- Adjustable Paddle Style Panels
- Commercial Hi-Bay Applications
- Adjustable Beam Angle: 0° to 90°
- Aluminum Housing
- Polycarbonate Lens
- UL Listed

CAT. NO.	BASE	WATTS	VOLTS	LUMENS	COLOR TEMP	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
70623	E26	100W	120-277V	15,000	5000K	250W	4.4	6
70624	E39	150W	120-277V	18,000	5000K	400W	3.5	4



# RETROFIT GARAGE & WORKSHOP LAMP

- Adjustable Paddle Style Panels
- Shop & Garage Low Bay Applications
- Adjustable Beam Angle: 0° to 90°
- E26 Base
- Aluminum Housing
- Polycarbonate Lens
- UL Listed

CAT. NO.	WATTS	VOLTS	LUMENS	COLOR TEMP	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
70625	50W	120-277V	6,000	5000K	150W	4.4	6
70626	100W	120-277V	12,000	5000K	250W	3.5	4





# WATTAGE SELECTABLE GENERAL PURPOSE RETROFIT LAMP





- E26 or E39 Base
- Polycarbonate Housing
- Polycarbonate Diffused Lens
- 70604B/705605B are Color Selectable
- IP64 Wet Location Rated
- DLC Listed
- UL Listed

CAT. NO.	PRIOR CAT. NO.	WATTS	VOLTS	BASE TYPE	PARTIAL CUTOFF	LUMENS	REPLACES METAL HALIDE	COLOR TEMP	LENGTH	DIAMETER	CASE QTY
70601B*	70600A, 01A	25W/36W	120-277V	E26	NO	4,450	100W	5000K	8-3/4"	2-3/8"	24
70618B*	70618A, 19A	32W/45W	120-277V	E26	NO	5,535	150W	5000K	9"	3-3/8"	24
70602B*	70602A,	42W/60W	120-277V	E26	NO	7,516	175W	5000K	9-1/4"	3-1/2"	12
70620B	70620A, 03A	42W/60W	120-277V	E39	NO	7,516	175W	5000K	9-1/4"	3-1/2"	12
70604B		<b>70W/100W</b>	120-277V	E39	NO	<b>11,746 @ 4K</b>	400W	<b>4K/5K</b>	11-7/8"	3-1/2"	12
70605B		<b>84W/120W</b>	120-277V	E39	NO	<b>14,404 @ 4K</b>	500W	<b>4K/5K</b>	11-1/2"	4-1/2"	6

\*NOT DLC LISTED

# AREA LIGHT/SHOEBOX RETROFIT LAMP

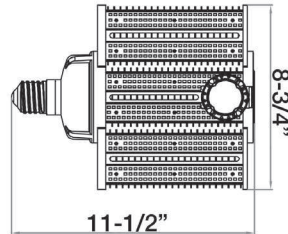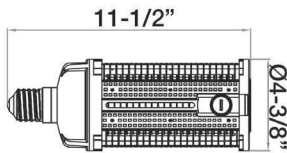

- E39 Mogul Base
- Aluminum Housing
- Polycarbonate Diffused Lens
- IP65 Wet Location Rated
- DLC Listed
- UL Listed

CAT. NO.	FIG.	WATTS	VOLTS	COLOR TEMP	LUMENS	REPLACES METAL HALIDE	WEIGHT (LBS)	CASE QTY
70617A	1	110W	120-277V	5000K	12,911	400W	3.4	6

# E39 TO E26 BASE ADAPTOR

CAT. NO.	APPLICATION	WEIGHT (LBS)	CASE QTY
71879	CONVERT E39 BASE TO E26 BASE	1	50







## ***COLOR SELECTABLE***

### ***120V UNDERCABINET LIGHTING***

- Internal Wiring Compartment
- Integral On/Off Switch
- Grounded Receptacle
- Beam Angle: 120°
- Linkable - Jump Cords Sold Separately
- TRIAC Dimmable
- Powder Coated Steel Housing - PC Lens
- ETL Listed



CAT. NO.	LENGTH	COLOR	COLOR TEMP	TYPE	WATTS	VOLTS	LUMENS	WIDTH	HEIGHT	CASE QTY
71251A	9"	WHITE	3000K 4000K	HARD WIRE	5W	120V	270	3.5"	1"	4
71252A	12"	WHITE	3000K 4000K	HARD WIRE	5W	120V	270	3.5"	1"	4
71260A	18"	WHITE	3000K 4000K	HARD WIRE	9W	120V	460	3.5"	1"	4
71264A	24"	WHITE	3000K 4000K	HARD WIRE	9W	120V	460	3.5"	1"	4
<b>ACCESSORIES</b>										
71265					6" JUMPER CORD					12
71266					12" JUMPER CORD					12
71267					24" JUMPER CORD					12
71268					36" JUMPER CORD					12
71273					48" JUMPER CORD					12



## ***CLOUD/PUFF LIGHTING***

- Frosted PMMA Lens
- Steel Base
- White Powder Coat Finish
- Input Voltage: 120VAC
- Dry Location Rated
- Energy Star Listed
- ETL Listed



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	DIAMETER	COLOR TEMP	WATTS	DIMMING	LUMENS	VOLTS	DEPTH	REPLACES INCANDESCENT	CASE QTY
<b>ROUND PUFF</b>										
72241	1	11"	4000K	12W	TRIAC	1,040	120V	3"	75W	8
72243	1	14"	4000K	17W	TRIAC	1,300	120V	3"	100W	2
<b>ROUND DRUM</b>										
72245	2	11"	4000K	12W	TRIAC	1,040	120V	3"	75W	8
72246	2	14"	3000K	17W	TRIAC	1,300	120V	3"	100W	2
72247	2	14"	4000K	17W	TRIAC	1,300	120V	3"	100W	2
<b>SQUARE PUFF</b>										
72249	3	11"	4000K	17W	NO	1,460	120/277V	3"	100W	4
72251	3	14"	4000K	25W	NO	1,960	120/277V	3"	150W	2
72252*	3	19"	3000K	34W	NO	2,403	120/277V	3"	200W	2

\*NOT ENERGY STAR LISTED



# PRO SERIES



- Plug and play concept that allows you to add accessories such as a humidity sensor
- 80 Thru 100 cfm Models
- Fan with a ceiling grille and damper.
- Square footage: up to 130 sq. ft.
- The product is provided with an adjustable 12-24" bar hanger for ease of installation
- Built-In Backdraft Damper
- High Efficiency Motor
- Uses A 4" Flexible Duct
- Meets ASHRAE Standard 62.2
- 3 Year Warranty
- Energy Star Listed
- ETLus Listed



CAT. NO.	VOLTAGE	CFM	SONES	PRODUCT HEIGHT	CASE QTY	
		<b>80 CFM</b>				
PRO 80		80	1.2	3-3/4"	1	
		<b>100 CFM</b>				
PRO 100		100	2.0	3-3/4"	1	
<b>ACCESSORIES</b>						
PRO HUMIDITY SENSOR	PRO 80 & 100 HUMIDITY SENSOR				1	
PRO LED LIGHT GRILLE	PRO 80 & 100 REPLACEMENT GRILLE WITH 3K I/W LED LIGHT				1	

Bath Fans

# PRO PLUS SERIES



- The fan provides 4 different airflows: 80-90-110-140 cfm.
- Fan with a ceiling grille, damper, humidity and motion sensor
- Pro Plus-L includes an I/W LED light
- Square footage: up to 130 sq. ft.
- Less than 0.5 Sones
- High Efficiency Motor
- Uses a 6" flexible duct
- The product is provided with an adjustable 12-24" bar hanger for ease of installation
- Meets ASHRAE Standard 62.2
- 5 Year Warranty
- Energy Star Listed
- ETLus Listed



PRO PLUS

PRO PLUS-L

140 CFM

CAT. NO.	FIG.	VOLTAGE	CFM	LED LIGHT	PRODUCT HEIGHT	CASE QTY
PRO PLUS	1	120	80-140	NO	7-5/8"	1
PRO PLUS-L	2	120	80-140	YES	7-5/8"	1

# INLINE FANS



FIG. 1

FIG. 2

FIG. 3

FIG. 4

FIG. 5

FIG. 6

FIG. 7

## FG Series

- Suitable with indoor installations
- Speed-controllable
- Built-in thermal overload protection with automatic reset
- Can be installed in any position
- Mounting bracket and hardware included
- **Not for Radon Mitigation applications!**
- cULus Listed
- **Not Energy Star Listed**

## FR Series

- Indoor/outdoor use
- Vibration welded seam ensures leak proof housing
- Speed-controllable
- Air stream temperatures up to 140°F
- Mounting bracket and hardware included
- **Not for Radon Mitigation applications!**
- Energy Star Listed
- cULus Listed

## PB Series

- Remote mount fan ensures quiet operation
- Unobtrusive grille makes for better aesthetics
- Backdraft damper included
- 7" white round plastic grille
- **Not for Radon Mitigation applications!**
- Energy Star Listed
- cULus Listed

CAT. NO.	FIG.	VOLTAGE	CFM	SIZE	HOUSING	CASE QTY
<b>FG SERIES</b>						
FG 4XL	1	120	173	4"	METAL	1
FG 6M	1	120	418	6"	METAL	1
FG 6XL	1	120	492	6"	METAL	1
<b>FR SERIES</b>						
FR 100	2	120	151	4"	MOLDED PLASTIC	1
<b>PB SERIES</b>						
PB 110	3	120	139	4"	METAL	1
PB 110L10	4	120	127	4"	METAL	1
PB 270-2	5	120	291	6"	METAL	1
PB 270L10-2	6	120	291	6"	METAL	1
<b>ACCESSORIES</b>						
RSK 4 DAMPER	7			4" DAMPER		1
RSK 6 DAMPER	7			6" DAMPER		1

# BATH FANS - RETROFIT KITS



## Included In Kit:

- Inline Fan FG4, 1 pc
- Mounting Bracket, 1 pc
- VT 20M Main Control, 1 pc
- 3" to 4" Adapters, 2 pcs
- Wire Connectors, 2 pcs
- Cable Restraint, 1 pc
- 8' Flexible Insulated 4" Duct, 1 pc
- 12' 14-2 Insulated Electrical Wire, 1 pc
- Operation and Installation Manual, 1 pc



CAT. NO.	DESCRIPTION	CFM	CASE QTY
BFRK 100	4" BATH FAN RETROFIT KIT	135	1



FIG. 1



FIG. 2



FIG. 3

## WALL EXHAUST FAN

### RVF SERIES

- Exterior wall-mount exhaust fan
- Lightweight, compact and easy to install
- The housing can be removed for immediate access to the motor & wiring connections
- Galvanized sheet metal housing with white powder coat
- cULus & cCSAus Listed

### PBW SERIES

- 110 cfm
- Exterior remote mount installation ensures quiet operation
- Unobtrusive grille makes for better aesthetics
- PBW 110H Includes a 50W dimmable halogen bulb
- cULus & cCSAus Listed

CAT. NO.	FIG.	DESCRIPTION	CFM	VOLTAGE	CASE QTY
<b>RVF SERIES</b>					
RVF 4	1	4" EXTERIOR WALL EXHAUST FAN	135	120	1
RVF 6	1	6" EXTERIOR WALL EXHAUST FAN	242	120	1
<b>PBW SERIES</b>					
PBW 110	2	BATH FAN EXT. MOUNT VENT ONLY CEILING GRILLE, 4" DUCT	110	120	1
PBW 110H	3	BATH FAN EXT. MOUNT W/ DIM 50W HALO LIGHT, 4" DUCT	110	120	1

## ACCESSORIES



FIG. 1



FIG. 2



FIG. 3



FIG. 4



FIG. 5



FIG. 6



FIG. 7

CAT. NO.	FIG.	DESCRIPTION	CASE QTY
FC 6	1	MOUNTING CLAMPS, 6" DUCT (PAIR)	1
FLD 60	2	LIGHT/FAN SWITCH - UP TO 60 MIN. DELAY 115V	1
IPF 05	3	SPEED CONTROL, 5A, WHITE, DEC PLATE INC.	1
IPHS 5	4	HUMIDITY SENSOR / FAN CONTROL, 120V, 10A	1
FD 60EM	5	ELECTRONIC TIMER, 10/20/30/60 MIN, 20A, 1800W MAX LOAD	1
FAT10	6	ATTIC THERMOSTAT 80-130F, 13A	1
DG 4	7	DESIGNER EXHAUST GRILLE W/ COLLAR, 4" DUCT	1
DG 6	7	DESIGNER EXHAUST GRILLE W/ COLLAR, 6" DUCT	1



# LED DIMMERS 12V/24V DC

- LED Compatible
- 12V or 24V DC
- PWM DIMMING
- Decorative PC Housing & Face
- MOV Surge Suppression
- ETL Listed



FIG. 1

FIG. 2

FIG. 3

FIG. 4

CAT. NO.	FIG.	VOLTS (DC)	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	FLUORESCENT WATTS	CASE QTY
82840	1	12/24V	SLIDE/ON/OFF SWITCH	1P	60W	NO	10/60
82841	1	12/24V	SLIDE/ON/OFF SWITCH	3 WAY	60W	NO	10/60
82842	2	12/24V	SLIDE	1P	60W	NO	10/60
82843	2	12/24V	SLIDE	3 WAY	60W	NO	10/60
82844	2	12/24V	SLIDE	1P	100W	NO	10/60
82845	3	12/24V	DUAL SLIDE	2P	60W PER POLE	NO	10/60
82860	4	12/24V	ROCKER	1P	60W	NO	10/60
82861	4	12/24V	ROCKER	3 WAY	60W	NO	10/60
82850	4	12/24V	ROCKER	3 WAY	100W	NO	10/60

# LED DIMMERS 120VAC

- LED Compatible
- 120V
- TRIAC Dimming
- Full Range Dimming
- MOV Surge Suppression
- Decorative PC Housing
- ETL Listed



FIG. 1

FIG. 2

FIG. 3

FIG. 4

FIG. 5

CAT. NO.	FIG.	VOLTS	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	FLUORESCENT WATTS	MICRO CONTROLLER	SENSITIVITY ADJ DIAL	CASE QTY
82859	1	120V	SLIDE/ON/OFF SWITCH	1 POLE	150	700	NO	YES	10/60
82846	1	120V	SLIDE/ON/OFF SWITCH	3 WAY	150	700	NO	YES	10/60
82847	2	120V	ROCKER	1 POLE	150	600	NO	NO	10/60
82848	2	120V	ROCKER	3 WAY	150	600	NO	NO	10/60
82862	2	120V	ROCKER	1 POLE	150	700	NO	YES	10/60
82863	3	120V	ROCKER	1 POLE	150	600	YES	NO	10/60
82853	3	120V	ROCKER	3 WAY	150	600	YES	NO	10/60
82864	4	120V	SLIDE/ON/OFF SWITCH	1 POLE	150	600	YES	NO	10/60
82865	4	120V	SLIDE/ON/OFF SWITCH	3 WAY	150	600	YES	NO	10/60
82855	5	120V	SLIDE/ROCKER	1 POLE/3 WAY	150	700	NO	YES	10/60

# LED DIMMERS 120VAC 0-10V DIMMING

- LED Compatible
- 0-10V Dimming
- 120/277V
- LED, CFL & Electronic Self Ballasted Applications
- MOV Surge Suppression
- Decorative PC Housing
- Adjustable High End/Low End Trim Sensitivity Dial to Optimize Dimming
- ETL Listed



FIG. 1

FIG. 2

FIG. 3

CAT. NO.	FIG.	VOLTS	FUNCTIONS	SWITCH RATING	LED/CFL WATTS	INCANDESCENT WATTS	AMPS	CASE QTY
82851	1	120/277V	ROCKER	1P/3 WAY	150W	600W	3A @120V; 1A @ 277V	60
82852	2	120/277V	ROCKER	1P/3 WAY	150W	600W	6A @120V; 3A @ 277V	60
82854	3	120/277V	ROCKER	1P/3 WAY	150W	600W	6A @120V; 3A @ 277V	60



## DIMMER WITH MOTION SENSOR

- PIR Motion Sensor
- Sensitivity, Light Level and Time Delay Settings
- Resistive: 3A
- Motor: 1/8 HP
- 180° Coverage
- 1200 Sq Ft Area
- LED, CFL & Electronic Self Ballasted Applications
- Operating Temperature: -4°F To 140°F
- LED Compatible
- MOV Surge Suppression
- Decorative PC Housing
- UL Listed



CAT. NO.	VOLTS	DIMMING	SWITCH RATING	LED/CFL WATTS	BALLAST WATTS	CASE QTY
82656	120-277V	0-10V	1P	150W	800W	10/60
82657	120V	0-120V	1P	150W	800W	10/60



## DUAL SLIDE FAN SPEED AND LIGHT CONTROLS

- LED Compatible
- Fan Control: 3 Speed or Fully Variable
- Light Control: Fully Variable
- 120V
- LED, CFL & Electronic Self Ballasted Applications
- Operating Temperature: 32°F To 104°F
- Material: PC Housing and Face Plate
- ETL Listed



CAT. NO.	VOLTS	FUNCTIONS	SWITCH RATING	CURRENT RATING	LED WATTS	INCANDESCENT/ HALOGEN WATTS	CASE QTY
82654	120V	3 SPEED	1P	5A	150W	360W	10/60
82655	120V	FULL VARIABLE	1P	2.5A	150W	360W	10/60



## SLIDE FAN SPEED CONTROL

- Fan Control: 3 Speed
- 120V
- Operating Temperature: 32°F To 104°F
- Material: PC Housing and Face Plate
- ETL Listed



CAT. NO.	VOLTS	FUNCTIONS	SWITCH RATING	CURRENT RATING	CASE QTY
82664	120V	SLIDE SWITCH	1P	2.5A	10/60



# WALL MOUNT OCCUPANCY/VACANCY SENSOR



Occupancy Sensors



## PIR

CAT. NO.	COLOR	SWITCH TYPE	SWITCH RATING	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTS	LED WATTS	TIME DELAY	CASE QTY
80520	IVORY	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	300W	5 SEC-30 MIN	50
80521	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	300W	5 SEC-30 MIN	50
80540	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE 3-WAY	800W @ 120V 1200W @ 277V	180°	120-277V	300W	5 SEC-30 MIN	50



## NO NEUTRAL - PIR

CAT. NO.	COLOR	SWITCH TYPE	SWITCH RATING	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTS	LED WATTS	TIME DELAY	CASE QTY
80528	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	300W	5 SEC-30 MIN	50
80532	WHITE	AUTO ON/OFF MANUAL ON/AUTO OFF	SINGLE POLE 3-WAY	800W @ 120V 1200W @ 277V	180°	120-277V	300W	5 SEC-30 MIN	50



## DOUBLE POLE - PIR

CAT. NO.	COLOR	SWITCH TYPE	SWITCH RATING	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTS	LED WATTS	CASE QTY
80544	WHITE	ON/OFF AUTO MANUAL ON/AUTO OFF	DOUBLE POLE	800W @ 120V	180°	120V	150W	50
80548	WHITE	ON/OFF AUTO MANUAL ON/AUTO OFF	DOUBLE POLE	800W @ 120V 1200W @ 277V	180°	120-277V	150W	50

# MOTION SENSOR SWITCH - PIR



FIG. 1  
CEILING



FIG. 2  
HI-BAY

CAT. NO.	FIG.	COLOR	INCANDESCENT/FLUORESCENT RATING	COVERAGE	VOLTS	CASE QTY
80552	1	WHITE	800W @ 120V, 1200W @ 277V	360°, 20FT DIAMETER @ 15FT HEIGHT, 15FT DIAMETER @ 10FT HEIGHT	120-277V	50
80556	2	WHITE	800W @ 120V, 1200W @ 277V	360° - 30FT HEIGHT & 40FT DIAMETER	120-277V	50



# LED FIBERGLASS LAMPHOLDERS WITH LAMP



- LED & GU24 Lampholder
- Polycarbonate Cover
- Twist Lock Mounting
- GU24 Base
- Fits 3-1/4" or 4" Outlet Box
- Lamp Included
- 9 Watts
- 800 Lumens
- 4-1/2" Outside Diameter
- 7" Leads
- Input Voltage: 120V
- UL Listed



CAT. NO.	DESCRIPTION	WATTS	VOLTS	LUMENS	DIMENSIONS				CASE QTY
					A	B	C	D	
72530	KEYLESS	9W	120V	800	3-1/16"	3-1/2"	1-1/2"	4-1/2"	24
72531	PULL CHAIN	9W	120V	800	3-1/16"	3-7/8"	1-1/4"	5"	48
72532	GU24 LED	9W	120V	800	2-1/2"	1-1/16"	-	3-1/8"	48

## TOMBSTONE LED & T8

- Medium Bi-Pin Fluorescent
- Slide-On with Captive Nut
- Push Wire Terminations
- 660W



CAT. NO.	STYLE	VOLTAGE	BAG QTY
<b>LOW PROFILE</b>			
45225	NON-SHUNTED	600V	10
45227	SHUNTED	1000V	10
<b>TALL PROFILE</b>			
45226	NON-SHUNTED	600V	10
45228	SHUNTED	1000V	10

## FIXTURE HOOKS



18092



18095A

CAT. NO.	THREAD SIZE	CASE QTY
18095A	1/2"	300
18092	3/4"	50



## DIGITAL SELF-ADJUSTING TIMER - SUNTRACKER

7 DAY IN-WALL

SUNTRACKER & DAYLIGHT SAVINGS FEATURES

CAT. NO.	COLOR	SUNTRACKER	CASE QTY
80510	IVORY	NO	6
80511	WHITE	NO	6
80515	IVORY	YES	6
80516	WHITE	YES	6



## IN-WALL COUNTDOWN TIMER

CAT. NO.	COLOR	CASE QTY
80505	WHITE	6





# LED EXIT SIGNS



Exit Signs

CAT. NO.	LED COLOR	HOUSING COLOR	VOLTS	BATTERY BACKUP	CASE QTY
<b>STANDARD</b>					
73010	RED	WHITE	120/277V	NO	6
73012	RED	WHITE	120/277V	YES	6
73013	RED	BLACK	120/277V	YES	6
73014	GREEN	WHITE	120/277V	NO	6
73016	GREEN	WHITE	120/277V	YES	6
73017	GREEN	BLACK	120/277V	YES	6
<b>REMOTE CAPABLE (USE ONLY 3.6V LED REMOTE HEADS)</b>					
73022	RED	WHITE	120/277V	YES	6
73024	GREEN	WHITE	120/277V	YES	6
73025	GREEN	BLACK	120/277V	YES	6
<b>2 CIRCUIT UNIT WIRED FOR AC POWER &amp; DC GENERATOR BACKUP</b>					
73026	RED	WHITE	120/277V	NO	6
<b>STANDARD WITH SELF DIAGNOSTIC</b>					
73512	RED	WHITE	120/277V	YES	6
73514	GREEN	WHITE	120/277V	YES	6
<b>REMOTE CAPABLE WITH SELF DIAGNOSTIC (USE ONLY 3.6V LED REMOTE HEADS) (WILL NOT OPERATE CORRECTLY UNLESS USED WITH REMOTE HEADS)</b>					
73516	RED	WHITE	120/277V	YES	6
73518	GREEN	WHITE	120/277V	YES	6

CAT. NO.	LETTER COLOR	HOUSING FINISH	VOLTS	FACE COLOR	CASE QTY
73340	RED	BRUSHED ALUMINUM	120/277V	BRUSHED ALUMINUM	6
73343	RED	BLACK	120/277V	BRUSHED ALUMINUM	6
73344	RED	BLACK	120/277V	BLACK	6
73346	RED	WHITE	120/277V	BRUSHED ALUMINUM	6
73348	RED	WHITE	120/277V	WHITE	6
73360	GREEN	BRUSHED ALUMINUM	120/277V	BRUSHED ALUMINUM	6
73363	GREEN	BLACK	120/277V	BRUSHED ALUMINUM	6
73364	GREEN	BLACK	120/277V	BLACK	6
73366	GREEN	WHITE	120/277V	BRUSHED ALUMINUM	6
<b>EXTRA FACE PLATES</b>					
73380	RED	BRUSHED ALUMINUM			
73381	RED	BLACK			
73382	RED	WHITE			
73383	GREEN	BRUSHED ALUMINUM			
73384	GREEN	BLACK			
73385	GREEN	WHITE			

# EDGE LIT EXIT SIGNS



## SURFACE MOUNT



CEILING MOUNT



SIDE MOUNT



WALL MOUNT

To Convert Single Sided Fixture to Double Sided Legend:  
73320 Red Double Sided Legend Panel  
73322 Green Double Sided Legend Panel

CAT. NO.	PANEL COLOR	VOLTS	HOUSING	CASE QTY
<b>SURFACE MOUNT ONE SIDED LEGEND</b>				
73310	RED ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73311	RED ON CLEAR	120/277V	WHITE	4
73312	RED ON CLEAR	120/277V	BLACK	4
73315	GREEN ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73316	GREEN ON CLEAR	120/277V	WHITE	4
73317	GREEN ON CLEAR	120/277V	BLACK	4
<b>SURFACE MOUNT DOUBLE SIDED LEGEND</b>				
73402*	RED ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73403*	RED ON CLEAR	120/277V	WHITE	4
73404*	RED ON CLEAR	120/277V	BLACK	4
73405*	GREEN ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73406*	GREEN ON CLEAR	120/277V	WHITE	4
73407*	GREEN ON CLEAR	120/277V	BLACK	4
<b>DOUBLE SIDED PANELS</b>				
73320	RED DOUBLE SIDED PANEL			
73322	GREEN DOUBLE SIDED PANEL			

## RECESSED MOUNT



To Convert Single Sided Fixture to Double Sided Legend:  
73320 Red Double Sided Legend Panel  
73322 Green Double Sided Legend Panel

CAT. NO.	PANEL COLOR	VOLTS	HOUSING	CASE QTY
<b>RECESSED MOUNT ONE SIDED LEGEND</b>				
73330	RED ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73331	RED ON CLEAR	120/277V	WHITE	4
73332	RED ON CLEAR	120/277V	BLACK	4
73335	GREEN ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73336	GREEN ON CLEAR	120/277V	WHITE	4
73337	GREEN ON CLEAR	120/277V	BLACK	4
<b>RECESSED MOUNT DOUBLE SIDED LEGEND</b>				
73412*	RED ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73413*	RED ON CLEAR	120/277V	WHITE	4
73415*	GREEN ON CLEAR	120/277V	ANODIZED ALUMINUM	4
73416*	GREEN ON CLEAR	120/277V	WHITE	4
73417*	GREEN ON CLEAR	120/277V	BLACK	4
<b>DOUBLE SIDED PANELS</b>				
73320	RED DOUBLE SIDED PANEL			
73322	GREEN DOUBLE SIDED PANEL			

\* Double Sided fixtures have a Mylar separator in center so you only see EXIT from one side

\* Double Sided fixtures have a Mylar separator in center so you only see EXIT from one side





## OUTDOOR COLD WEATHER & WET LOCATION

CAT. NO.	LED COLOR	VOLTS	HOUSING	CASE QTY
73386	RED	120/277V	WHITE	6
73387	RED	120/277V	BLACK	6
73388	GREEN	120/277V	WHITE	6
73389	GREEN	120/277V	BLACK	6
<b>COLD WEATHER SELF DIAGNOSTIC</b>				
73371	RED	120/277V	WHITE	6
<b>BLANK BACK MOUNTING PLATE (ONE SIDED APPLICATIONS-SOLD SEPARATELY)</b>				
73378		BLANK PLATE - WHITE		1
73379		BLANK PLATE - BLACK		1



2 LEGEND PLATES INCLUDED  
BLANK MOUNTING PLATE SOLD SEPARATELY



## OUTDOOR COLD WEATHER & WET LOCATION COMBO SURFACE MOUNT

CAT. NO.	LETTER COLOR	VOLTS	LUMENS PER HEAD	HOUSING COLOR	CASE QTY
FIXTURES INCLUDE TWO LEGEND PLATES					
73375	RED	120/277V	219	WHITE	4
<b>REMOTE CAPABLE</b>					
73376	RED	120/277V	219	WHITE	4
73369	RED	120/277V	219	BLACK	4
<b>BLANK BACK MOUNTING PLATE (ONE SIDED APPLICATIONS-SOLD SEPARATELY)</b>					
73378			BLANK PLATE - WHITE		1
73379			BLANK PLATE - BLACK		1



Cold Weather / Exit / Emergency



## OUTDOOR COLD WEATHER WET LOCATION LED EMERGENCY REMOTE CAPABLE

CAT. NO.	HOUSING	VOLTS	BATTERY	CASE QTY
73370	POLY-CARBONATE	120/277V	9.6V 1900 MAH NI-CAD	4



## INDOOR LED EMERGENCY LIGHTS WET LOCATION

CAT. NO.	VOLTS	BATTERY	CASE QTY
73396A	120/277V	NICKEL CADMIUM	4



## INDOOR LED COMBO EXIT/EMERGENCY LIGHT WET LOCATION

CAT. NO.	LED COLOR	VOLTS	BATTERY	LENGTH	DEPTH	HEIGHT	CASE QTY
<b>STANDARD EXIT SIGN</b>							
73452	RED	120/277V	24V 500MAH NI-CD	12-5/8"	2-1/2"	8-1/8"	4
73453	GREEN	120/277V	24V 500MAH NI-CD	12-5/8"	2-1/2"	8-1/8"	4
<b>REMOTE CAPABLE EXIT SIGN</b>							
73454	RED	120/277V	3.6V 1800MAH NI-MH	12-5/8"	2-1/2"	8-1/8"	4
<b>STANDARD COMBO HIGH OUTPUT</b>							
73456	RED	120/277V	3.6V 1000MAH NI-CD	12-9/16"	2-1/2"	13-5/16"	4
73457	GREEN	120/277V	3.6V 1000MAH NI-CD	12-9/16"	2-1/2"	13-5/16"	4
<b>REMOTE CAPABLE COMBO HIGH OUTPUT</b>							
73458	RED	120/277V	3.6V 1800MAH NI-MH	12-9/16"	2-1/2"	13-5/16"	4





## LIGHT PIPE LED COMBO



CAT. NO.	LED COLOR	VOLTS	HOUSING	LUMENS	WIDTH	DEPTH	HEIGHT	CASE QTY
73372	RED	120/277V	WHITE	184	12.50"	1.87"	8.25"	6
73373	GREEN	120/277V	WHITE	184	12.50"	1.87"	8.25"	6
				<b>SELF DIAGNOSTIC</b>				
73374	RED	120/277V	WHITE	184	12.50"	1.87"	8.25"	6

## LED COMBO EXIT/EMERGENCY LIGHT ADJUSTABLE HEADS



CAT. NO.	LED COLOR	VOLTS	HOUSING COLOR	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
				<b>HIGH OUTPUT COMBO</b>				
73462	RED	120/277V	WHITE	76	20"	2"	8.10"	4
				<b>HIGH OUTPUT REMOTE CAPABLE COMBO (USE ONLY LED REMOTE HEADS)</b>				
73466	RED	120/277V	WHITE	76	20"	2"	8.10"	4
				<b>HIGH OUTPUT COMBO WITH SELF DIAGNOSTIC</b>				
73470	RED	120/277V	WHITE	76	20"	2"	8.10"	4
73472	GREEN	120/277V	WHITE	76	20"	2"	8.10"	4
				<b>HIGH OUTPUT REMOTE CAPABLE COMBO WITH SELF DIAGNOSTIC (USE ONLY LED REMOTE HEADS) (WILL NOT OPERATE CORRECTLY UNLESS USED WITH REMOTE HEADS)</b>				
73474	RED	120/277V	WHITE	76	20"	2"	8.10"	4
73476	GREEN	120/277V	WHITE	76	20"	2"	8.10"	4



## LED COMBO EXIT/EMERGENCY LIGHT ROUND HEAD



CAT. NO.	LED COLOR	VOLTS	HOUSING COLOR	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
				<b>STANDARD</b>				
73040	RED	120/277V	WHITE	33	11.60"	2.00"	7.20"	6
73041	RED	120/277V	BLACK	33	11.60"	2.00"	7.20"	6
73042	GREEN	120/277V	WHITE	33	11.60"	2.00"	7.20"	6
73043	GREEN	120/277V	BLACK	33	11.60"	2.00"	7.20"	6
				<b>HIGH OUTPUT</b>				
73050	RED	120/277V	WHITE	76	11.60"	2.00"	7.20"	6
73052	GREEN	120/277V	WHITE	76	11.60"	2.00"	7.20"	6
				<b>HIGH OUTPUT REMOTE CAPABLE (USE ONLY LED REMOTE HEADS)</b>				
73054	RED	120/277V	WHITE	76	11.60"	2.00"	7.20"	6
73055	RED	120/277V	BLACK	76	11.60"	2.00"	7.20"	6
73056	GREEN	120/277V	WHITE	76	11.60"	2.00"	7.20"	6
73057	GREEN	120/277V	BLACK	76	11.60"	2.00"	7.20"	6
				<b>HIGH OUTPUT REMOTE CAPABLE WITH SELF DIAGNOSTIC (USE ONLY LED REMOTE HEADS) (WILL NOT OPERATE CORRECTLY UNLESS USED WITH REMOTE HEADS)</b>				
73538	GREEN	120/277V	WHITE	76	11.60"	2.00"	7.20"	6



## LED COMBO EXIT/EMERGENCY LIGHT SQUARE HEAD



CAT. NO.	LED COLOR	VOLTS	HOUSING COLOR	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
				<b>HIGH OUTPUT</b>				
73432	RED	120/277V	WHITE	76	11.60"	1.75"	7.20"	6
73433	RED	120/277V	BLACK	76	11.60"	1.75"	7.20"	6
73434	GREEN	120/277V	WHITE	76	11.60"	1.75"	7.20"	6
73435	GREEN	120/277V	BLACK	76	11.60"	1.75"	7.20"	6
				<b>HIGH OUTPUT REMOTE CAPABLE (USE ONLY LED REMOTE HEADS)</b>				
73442	RED	120/277V	WHITE	76	11.60"	1.75"	7.20"	6
73443	RED	120/277V	BLACK	76	11.60"	1.75"	7.20"	6
73444	GREEN	120/277V	WHITE	76	11.60"	1.75"	7.20"	6





## LED EMERGENCY LIGHT ROUND HEAD

CAT. NO.	COLOR	VOLTS	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
<b>STANDARD</b>							
73118	WHITE	120/277V	33	9"	2.75"	4-3/4"	12
73119	BLACK	120/277V	33	9"	2.75"	4-3/4"	12
<b>HIGH OUTPUT</b>							
73112	WHITE	120/277V	76	9"	2.75"	4-3/4"	12
<b>HIGH OUTPUT REMOTE CAPABLE (USE ONLY LED REMOTE HEADS)</b>							
73114	WHITE	120/277V	76	9"	2.75"	4-3/4"	12
73115	BLACK	120/277V	76	9"	2.75"	4-3/4"	12
<b>STANDARD WITH SELF DIAGNOSTIC</b>							
73522	WHITE	120/277V	33	9"	2.75"	4-3/4"	12
<b>HIGH OUTPUT REMOTE CAPABLE WITH SELF DIAGNOSTIC (USE ONLY LED HEADS) (WILL NOT OPERATE CORRECTLY UNLESS USED WITH REMOTE HEADS)</b>							
73524	WHITE	120/277V	76	9"	2.75"	4-3/4"	12



SELF-DIAGNOSTIC VERSION MONITORS BATTERY/CHARGER FAILURE, BATTERY DISCONNECT AND LAMP FAILURE

Emergency Lights



## LED EMERGENCY LIGHT SQUARE HEAD

CAT. NO.	COLOR	VOLTS	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
<b>HIGH OUTPUT</b>							
73424	WHITE	120/277V	76	9"	2.75"	4-3/4"	9
73425	BLACK	120/277V	76	9"	2.75"	4-3/4"	9
<b>HIGH OUTPUT REMOTE CAPABLE (USE ONLY LED REMOTE HEADS)</b>							
73426	WHITE	120/277V	76	9"	2.75"	4-3/4"	9
73427	BLACK	120/277V	76	9"	2.75"	4-3/4"	9



## LED EMERGENCY LIGHT ADJUSTABLE OPTICS

CAT. NO.	COLOR	VOLTS	LUMENS PER HEAD	WIDTH	DEPTH	HEIGHT	CASE QTY
73428	WHITE	120/277V	65	9.5"	2.25"	4-5/8"	12
73429	BLACK	120/277V	65	9.5"	2.25"	4-5/8"	12



## WET LOCATION ADJUSTABLE LED EMERGENCY LIGHT

CAT. NO.	VOLTS	HOUSING	CASE QTY
73398	120/277V	WHITE	6



## ADJUSTABLE LED EMERGENCY LIGHT WET LOCATION

CAT. NO.	COLOR	VOLTS	CASE QTY
73158	WHITE	120/277V	6

RECESSED EMERGENCY LIGHTING UNIT MOUNTS FLUSH WITH CEILING FOR A CONCEALED, UNOBTRUSIVE LOOK





# HI-CAPACITY EMERGENCY LIGHTING UNITS



6 VOLT AND 12 VOLT  
REMOTE CAPABILITY, EFFICIENT  
AND EASY TO INSTALL  
COMPLETELY SELF-CONTAINED &  
FULLY-AUTOMATIC

CAT. NO.	WATTS PER UNIT	VOLTS	MAXIMUM HEADS FOR 4 HRS OPERATION	MAXIMUM HEADS FOR 2 HRS OPERATION	MAXIMUM HEADS FOR 1.5 HRS OPERATION	CASE QTY
<b>6-VOLT UNITS WITH REMOTE CAPACITY 7.2 WATT WEDGE BASE LAMPS</b>						
73166	50W	120/277V	2	5	6	2
73170	100W	120/277V	5	10	13	2
<b>12-VOLT UNITS WITH REMOTE CAPACITY 9 WATT WEDGE BASE LAMPS</b>						
73176	50W	120/277V	2	4	5	2
73180	100W	120/277V	4	8	11	2

Use Multi-Volt Remote Heads at bottom of page


# LED EMERGENCY EGRESS



AC SECURITY LIGHTING  
DUSK TO DAWN  
EMERGENCY EGRESS

CAT. NO.	COLD WEATHER	WATTS	VOLTS	TITLE 24	LUMENS	CASE QTY
73300	NO	12W	120/277V	NO	1,286	6
73301	YES	12W	120/277V	NO	1,286	6
73302	YES	12W	120/277V	YES	1,286	6

# LED REMOTE LAMP HEADS

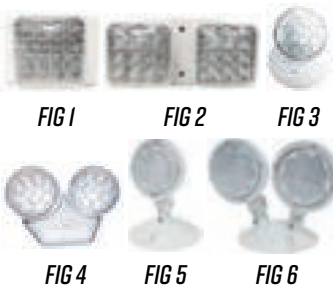

CAT. NO.	DESCRIPTION	FIG.	DIMENSIONS			VOLTS	WATTS	LUMEN PER HEAD	CASE QTY
			W	D	G				
73074	SINGLE HEAD	1	4.53"	4.53"	5.79"	3.6V	1.17W	76	20
73075	DOUBLE HEAD	2	7.38"	4.53"	6.53"	3.6V	2.34W	76	10
73116	SINGLE HEAD	3	4.5"	2.75"	4.5"	3.6V	1.72W	76	24
73117	DOUBLE HEAD	4	6.5"	2.75"	4.75"	3.6V	3.4W	76	10
73126	SINGLE HEAD WEATHERPROOF	5	4.53"	4.53"	5.79"	3.6V	1.17W	76	20
73127	DOUBLE HEAD WEATHERPROOF	6	7.38"	4.53"	6.53"	3.6V	2.34W	76	10

# LED MULTI-VOLT REMOTE LAMP HEADS

3.6V/6V/9.6V/12V



CAN BE USED WITH 6V/12V INCANDESCENT FIXTURES

CAT. NO.	DESCRIPTION	FIG.	DIMENSIONS			COLOR	WATTS	LUMEN PER HEAD	CASE QTY
			W	D	G				
<b>MULTI-VOLT LAMP HEADS 3.6V/6V/9.6V/12V</b>									
73303	SINGLE HEAD	1	4.5"	2.75"	4.5"	WHITE	1W	45	12
73304	DOUBLE HEAD	2	6.5"	2.75"	4.75"	WHITE	2W	45	12
73305	SINGLE HEAD WEATHERPROOF	3	4.53"	4.53"	5.79"	GRAY	1W	45	12
73306	DOUBLE HEAD WEATHERPROOF	4	7.38"	4.53"	6.53"	GRAY	2W	45	12



## VANDAL/ENVIRONMENTAL SHIELD GUARD POLYCARBONATE

CAT. NO.	FOR USE WITH	SIZE (HT X W X D)	CASE QTY
73090	EXIT LIGHTS & CAST ALUMINUM EXIT LIGHTS	9" X 13.25" X 2.50"	16
73091	EMERGENCY LIGHTS	7" X 8.5" X 19.5"	3



73090



73091

## WIRE GUARDS

CAT. NO.	FOR USE WITH	SIZE (HT X W X D)	CASE QTY
73095	EMERGENCY LIGHTS, EXIT LIGHTS & CAST ALUMINUM EXIT LIGHTS	13.5" X 15" X 6"	10
73096	COMBO EXIT/EMERGENCY LIGHTS	13.5" X 30" X 6"	5



## FLUORESCENT EMERGENCY LIGHTING BALLASTS



FIG. 1



FIG. 2



FIG. 3

CAT. NO.	FIG.	LUMENS	LAMP TYPE	LAMP LENGTH	NO. OF LAMPS	WATTAGE	INPUT WATTAGE	VOLTS	LENGTH	WIDTH	HEIGHT	CASE QTY
72900	1	500	T8-T12	2' - 4'	1	17-40W	2.5	120/277V	9.4"	2.4"	1.5"	6
72901	2	300-650	2 PIN CFL	N/A	1	10-26W	3.5	120/277V	9.4"	2.4"	1.5"	6
72903	1	700	T8-T12	2' - 8'	1 OR 2	17-110W	3.5	120/277V	9.4"	2.4"	1.5"	6
72904	1	1,400	T8-T12	2' - 8'	1 OR 2	17-215W	4.0	120/277V	13.3"	2.4"	1.5"	6

CAT. NO.	FIG.	LUMENS	LAMP TYPE	LAMP LENGTH	NO. OF LAMPS	WATTAGE 1 LAMP	WATTAGE 2 LAMP	INPUT WATTAGE	VOLTS	LENGTH	WIDTH	HEIGHT	CASE QTY
72910	3	500	T5-T8	2' - 4'	1	28W	N/A	2.5	120/277V	10"	2"	1"	6
72913	3	700	T5-T8	2' - 4'	1 OR 2	14-54WW	14-39	3.32/3.78	120/277V	13.8"	2"	1"	6

Accessories / Ballasts



## MEETS NYC AND CHICAGO CODE REQUIREMENTS



### LED CHICAGO CODE EXIT SIGN



CAT. NO.	LED COLOR	VOLTS	HOUSING	WIDTH	DEPTH	HEIGHT	CASE QTY
<b>STANDARD EXIT - AC ONLY</b>							
73611	RED	120/277V	WHITE - STEEL	10.9"	3"	16.01"	10
<b>STANDARD EXIT WITH BATTERY BACKUP</b>							
73612	RED	120/277V	WHITE - STEEL	10.9"	3"	16.01"	10

### LED CHICAGO CODE EXIT/EMERGENCY SIGN



CAT. NO.	LED COLOR	VOLTS	HOUSING	WIDTH	DEPTH	HEIGHT	CASE QTY
73613	RED	120/277V	WHITE - STEEL	10.9"	3"	16.01"	4

### CHICAGO GLASS LEGEND PLATES



73620      73621      73625      73622      73623      73624

CAT. NO.	DESCRIPTION	CASE QTY
73620	EXIT - LEFT ARROW	1
73621	EXIT - RIGHT ARROW	1
73625	EXIT - NO ARROW	1
73622	STAIRS - LEFT ARROW	1
73623	STAIRS - RIGHT ARROW	1
73624	STAIRS - NO ARROW	1

### LED NEW YORK CITY CODE EXIT SIGN



CAT. NO.	LED COLOR	VOLTS	HOUSING	WIDTH	DEPTH	HEIGHT	CASE QTY
<b>STANDARD EXIT - AC ONLY</b>							
73601	RED	120/277V	WHITE - STEEL	14.5"	2.25"	10.5"	10
<b>STANDARD EXIT WITH BATTERY BACKUP</b>							
73602	RED	120/277V	WHITE - STEEL	14.5"	2.25"	10.5"	10

### LED NEW YORK CITY CODE EXIT/EMERGENCY SIGN



*OPTIONAL 3RD HEAD INCLUDED*

CAT. NO.	LED COLOR	VOLTS	HOUSING	WIDTH	DEPTH	HEIGHT	CASE QTY
73604	RED	120/277V	WHITE - STEEL	16.875"	2.5"	16.8"	4

### LED NEW YORK CITY CODE EMERGENCY LIGHT



CAT. NO.	VOLTS	HOUSING	WIDTH	DEPTH	HEIGHT	CASE QTY
73603	120/277V	WHITE - STEEL	13.3125"	2.1875"	13.5"	6

Code Compliant

# NUMERICAL INDEX

<b>120126</b>	<b>3</b>	<b>75B</b>	<b>1</b>	<b>75B75D</b>	<b>17</b>	<b>780786</b>	<b>4</b>	<b>78C</b>	<b>21</b>
<b>128123</b>	<b>3</b>	<b>78B78B</b>	<b>6</b>	<b>75D75E</b>	<b>44</b>	<b>78D786</b>	<b>4</b>	<b>78D</b>	<b>21</b>
<b>K9E</b>	<b>41</b>	<b>78C78C</b>	<b>7</b>	<b>75E75F</b>	<b>11</b>	<b>78E78A</b>	<b>4</b>	<b>78E78A</b>	<b>21</b>
<b>K9A</b>	<b>41</b>	<b>78E78A</b>	<b>7</b>	<b>75D</b>	<b>116</b>	<b>78E78A</b>	<b>47</b>	<b>78C</b>	<b>21</b>
<b>H1</b>	<b>B</b>	<b>78D78D</b>	<b>4</b>	<b>75D</b>	<b>116</b>	<b>78E78D</b>	<b>4</b>	<b>78D78B</b>	<b>B</b>
<b>30030E</b>	<b>20</b>	<b>78B78B</b>	<b>B</b>	<b>75A75A</b>	<b>6</b>	<b>78D78E</b>	<b>4</b>	<b>78C78C</b>	<b>2</b>
<b>30030B</b>	<b>9</b>	<b>75B78B</b>	<b>B</b>	<b>75B75B</b>	<b>3</b>	<b>78E78D</b>	<b>4</b>	<b>78C78C</b>	<b>2</b>
<b>30E30D</b>	<b>20</b>	<b>78B78B</b>	<b>B</b>	<b>78B</b>	<b>3</b>	<b>78E</b>	<b>4</b>	<b>78B78B</b>	<b>5</b>
<b>30030E</b>	<b>9</b>	<b>78B78B</b>	<b>23</b>	<b>78E78E</b>	<b>3</b>	<b>78E</b>	<b>4</b>	<b>78B78B</b>	<b>5</b>
<b>30030V</b>	<b>9</b>	<b>78A</b>	<b>23</b>	<b>78E78F</b>	<b>31</b>	<b>78E78V</b>	<b>4</b>	<b>78D</b>	<b>227</b>
<b>31E</b>	<b>9</b>	<b>78B</b>	<b>23</b>	<b>78B</b>	<b>3</b>	<b>78E78V</b>	<b>4</b>	<b>78E</b>	<b>228</b>
<b>425428</b>	<b>41</b>	<b>78A</b>	<b>26</b>	<b>78B</b>	<b>3</b>	<b>78E78V</b>	<b>4</b>	<b>78B</b>	<b>222</b>
<b>78B78B</b>	<b>37</b>	<b>78A</b>	<b>229</b>	<b>78V</b>	<b>3</b>	<b>78E78E</b>	<b>47</b>	<b>78D</b>	<b>222</b>
<b>78A</b>	<b>37</b>	<b>78A</b>	<b>26</b>	<b>78E78E</b>	<b>3</b>	<b>78E78A</b>	<b>47</b>	<b>78D78A</b>	<b>9</b>
<b>78B78B</b>	<b>37</b>	<b>78B</b>	<b>228</b>	<b>78V78D</b>	<b>3</b>	<b>78E78B</b>	<b>4</b>	<b>78D</b>	<b>9</b>
<b>78E78E</b>	<b>3</b>	<b>78A78A</b>	<b>23</b>	<b>78E78B</b>	<b>31</b>	<b>78E78B</b>	<b>47</b>	<b>78A78A</b>	<b>9</b>
<b>78B78B</b>	<b>2</b>	<b>78A78A</b>	<b>3</b>	<b>78E</b>	<b>3</b>	<b>78D78E</b>	<b>47</b>	<b>78A78A</b>	<b>9</b>
<b>78A78A</b>	<b>5</b>	<b>78A</b>	<b>228</b>	<b>22E22E</b>	<b>31</b>	<b>78E78E</b>	<b>4</b>	<b>78A78A</b>	<b>9</b>
<b>78B</b>	<b>5</b>	<b>78C78C</b>	<b>5</b>	<b>22B</b>	<b>3</b>	<b>78E</b>	<b>4</b>	<b>78D78B</b>	<b>D</b>
<b>78D78D</b>	<b>21</b>	<b>78B</b>	<b>21</b>	<b>26B26B</b>	<b>31</b>	<b>78A</b>	<b>4</b>	<b>78E78D</b>	<b>3</b>
<b>75A75A</b>	<b>3</b>	<b>78D</b>	<b>2</b>	<b>26E26E</b>	<b>3</b>	<b>78B</b>	<b>47</b>	<b>78A78A</b>	<b>3</b>
<b>78A78A</b>	<b>3</b>	<b>78D</b>	<b>225</b>	<b>2E</b>	<b>3</b>	<b>78D78D</b>	<b>51</b>	<b>78E78D</b>	<b>3</b>
<b>78E78E</b>	<b>3</b>	<b>78B78B</b>	<b>1</b>	<b>28B</b>	<b>31</b>	<b>78E78B</b>	<b>51</b>	<b>80E80E</b>	<b>41</b>
<b>7E3</b>	<b>3</b>	<b>78D</b>	<b>37</b>	<b>28B78B</b>	<b>31</b>	<b>78D78A</b>	<b>51</b>	<b>80E80E</b>	<b>4</b>
<b>78B</b>	<b>5</b>	<b>78B78B</b>	<b>26</b>	<b>28E78D</b>	<b>21</b>	<b>78E78E</b>	<b>51</b>	<b>80E80E</b>	<b>4</b>
<b>78C</b>	<b>5</b>	<b>78B</b>	<b>25</b>	<b>28D78D</b>	<b>5D</b>	<b>78C78C</b>	<b>1</b>	<b>880885</b>	<b>4</b>
<b>78C</b>	<b>5</b>	<b>78A</b>	<b>25</b>	<b>28E2B</b>	<b>5D</b>	<b>78A78A</b>	<b>2</b>	<b>880885</b>	<b>4</b>
<b>78B78B</b>	<b>2</b>	<b>78A</b>	<b>229</b>	<b>28D78V</b>	<b>4</b>	<b>78C78C</b>	<b>1</b>	<b>880885</b>	<b>4</b>
<b>78A78A</b>	<b>7</b>	<b>78A</b>	<b>26</b>	<b>78E78E</b>	<b>4</b>	<b>78C</b>	<b>2223</b>	<b>880885</b>	<b>4</b>
<b>78B78B</b>	<b>6</b>	<b>78A78A</b>	<b>28</b>	<b>78D78B</b>	<b>47</b>	<b>78C78C</b>	<b>1</b>	<b>880885</b>	<b>4</b>
<b>78D78D</b>	<b>4</b>	<b>78B</b>	<b>28</b>	<b>78D78E</b>	<b>47</b>	<b>78C</b>	<b>1</b>	<b>880885</b>	<b>4</b>
<b>78C</b>	<b>4</b>	<b>78A78A</b>	<b>27</b>	<b>78E78V</b>	<b>47</b>	<b>78C78C</b>	<b>1</b>	<b>880885</b>	<b>4</b>
<b>78D78D</b>	<b>4</b>	<b>78A</b>	<b>28</b>	<b>78E</b>	<b>4</b>	<b>78B78B</b>	<b>2</b>	<b>880885</b>	<b>4</b>
<b>78B</b>	<b>4</b>	<b>78A</b>	<b>28</b>	<b>78B</b>	<b>4</b>	<b>78B</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78D</b>	<b>4</b>	<b>78A</b>	<b>28</b>	<b>78E78E</b>	<b>4</b>	<b>78C</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78D78D</b>	<b>4</b>	<b>78A78A</b>	<b>29</b>	<b>78E78V</b>	<b>4</b>	<b>78C</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78C</b>	<b>4</b>	<b>78E78E</b>	<b>27</b>	<b>78E78D</b>	<b>4</b>	<b>78B78B</b>	<b>22</b>	<b>880885</b>	<b>4</b>
<b>78B</b>	<b>4</b>	<b>20D20A</b>	<b>B</b>	<b>78E78E</b>	<b>4</b>	<b>78B78B</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78D78D</b>	<b>4</b>	<b>20A20A</b>	<b>26</b>	<b>78E</b>	<b>4</b>	<b>78A</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>75C75C</b>	<b>5</b>	<b>20E20E</b>	<b>B</b>	<b>78E</b>	<b>4</b>	<b>78B78B</b>	<b>22</b>	<b>880885</b>	<b>4</b>
<b>78B78B</b>	<b>4</b>	<b>28E28E</b>	<b>17</b>	<b>78D</b>	<b>4</b>	<b>78B78B</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78B</b>	<b>4</b>	<b>22E22E</b>	<b>3</b>	<b>78E</b>	<b>4</b>	<b>78C78C</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78C78C</b>	<b>4</b>	<b>23D23E</b>	<b>31</b>	<b>78D</b>	<b>4</b>	<b>78B</b>	<b>22</b>	<b>880885</b>	<b>4</b>
<b>78D</b>	<b>4</b>	<b>23E</b>	<b>8</b>	<b>78D78E</b>	<b>4</b>	<b>78B</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78B</b>	<b>4</b>	<b>23E2B</b>	<b>8</b>	<b>78E78E</b>	<b>4</b>	<b>78B</b>	<b>21</b>	<b>880885</b>	<b>4</b>
<b>78D78D</b>	<b>4</b>	<b>23E</b>	<b>8</b>	<b>78D78V</b>	<b>4</b>	<b>78B</b>	<b>223</b>	<b>880885</b>	<b>4</b>
<b>78B78B</b>	<b>6</b>	<b>23D23E</b>	<b>8</b>	<b>78E78E</b>	<b>4</b>	<b>78B</b>	<b>223</b>	<b>880885</b>	<b>4</b>
<b>78B78B</b>	<b>1</b>	<b>20A20A</b>	<b>B</b>	<b>78D78V</b>	<b>4</b>	<b>78B</b>	<b>2223</b>	<b>880885</b>	<b>4</b>

*SINGLE SOURCE...  
ELECTRICAL & LIGHTING*

**We've DISCONTINUED  
previous MORRIS  
tonakeroom for  
our new offering**

**Check out the Clearance ~~SALE~~  
on our website to see what's available**

**TRENCH**

**UNDERBENCHING**

**RESIDENTIAL/DORMS**

**HIGH-BAY-UC/INER**

**AREAS**

**VAULTS**

**fdlowis@MORRISPRODUCTS**



53 CAREY ROAD QUEENSBURY, NY 12804  
MORRISPRODUCTS.COM  
1.888.777.6678

AUG 2023 / CAT#00022



SCAN ME